



General range of flameproof electrical motors

Individual solutions are our standard

BARTEC VARNOST

The plant itself came into being in 1957 as one of the small working units of the Zagorje coal mine. Five years later, in 1962, it became a separate company called "TEVE VARNOST". Numerous organizational restructurations took place during the following years and in 1997 the company was taken over by BARTEC to become "BARTEC VARNOST".

BARTEC Motors and electrical equipment

BARTEC develops and manufactures electric motors and electrical equipment for safe and reliable solutions in power, lighting, control and monitoring applications.

Our production program includes:

- Electric motors
- Special motors and special solutions
- Switches and controllers
- Lighting systems

All products can be supplied for potentially explosive atmospheres, wet environments or tailored to our customers' requirements.



BARTEC VARNOST, Zagorje

Contents

1	<i>Ignition temperature - temperature class</i>	2
2	<i>Maintenance of explosion protection</i>	3
3	<i>Introduction</i>	4
4	<i>Construction</i>	5
	Construction	6
	Dimensions	6
	Type codes	6
	Bearings	7 - 8
	Shaft ends	9
	Allowable radial force	10
	Maximum axial loads	11
	Noise level and vibrations	12
	Terminal box and terminals for supply cable	13 - 14
	Mechanical protection and coating	15
	Arrangements	16
	Explosion protection and certificates	16
	Electrical datas	17
	Windings	18
	Test and tolerance band of the rated values	19
	Start-up characteristics	20
	Duty cycles	21 - 22
	Tables with ratings for single-speed motors	23 - 30
	Technical data and tables with ratings for pole changing motors	31 - 44
	Three phase motors supplied by frequency inverters	45 - 49
	Mounting dimensions	50
	Dimensions	51 - 55
	Special execution	56 - 59
	Special applications/options	60



1

Ignition temperature - temperature class


The ignition temperature is influenced by various factors such as size, shape, type and composition of a surface. In IEC 79-4, IEC, CENELEC and other standards the authorities have agreed on a "procedure for the determination of ignition temperature" with a limit approaching the lowest possible value.

The gases and vapours are classified into temperature classes. In accordance with these temperature classes, electrical equipment is tested for its maximum surface temperature to ensure that the possibility of ignition due to the surface temperature is excluded in normal and abnormal operation. The standards specify to which extent these standard values may be exceeded and determine the necessary safety margins.

Temperature class	Ignition temperature range of mixture	Permissible surface temperature of electrical equipment	Permissible temperature rise
T1	> + 450 °C	+ 450 °C	+ 410 °C
T2	> + 300... ≤ + 450 °C	+ 300 °C	+ 260 °C
T3	> + 200... ≤ + 300 °C	+ 200 °C	+ 160 °C
T4	> + 135... ≤ + 200 °C	+ 135 °C	+ 95 °C
T5	> + 100... ≤ + 135 °C	+ 100 °C	+ 60 °C
T6	> + 85... ≤ + 100 °C	+ 85 °C	+ 45 °C

Examples of the categorisation of gases and vapours in temperature classes and explosion protection subgroups.

	T1	T2	T3	T4	T5	T6
IIA	Methane	Propane	Petrol	Acetaldehyde		
IIB		Ethylene	Diethylether			
IIC	Hydrogen	Acetylene				Carbon disulphide

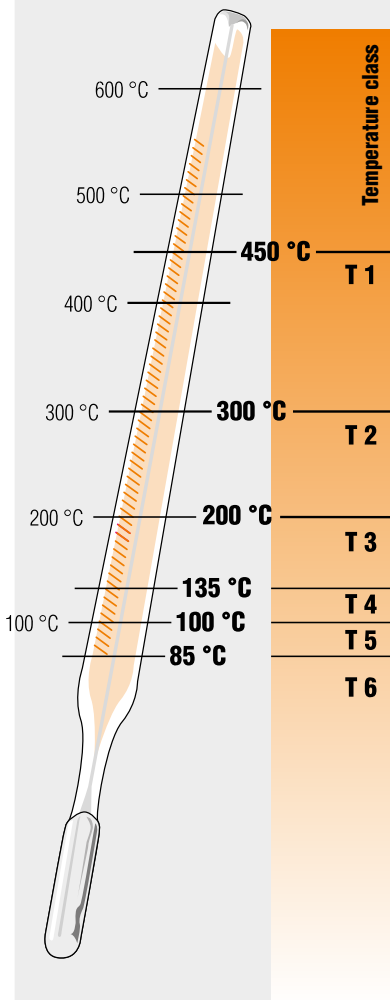



2

Maintenance of explosion protection

Maintenance of explosion protection during operation.

Electric machines must be protected against overheating due to overloads. The type of protection depends on the type of operation as well as the electric machine and its use.

Explosion-proof electric motors are usually certified for S1 type of operation, i. e. continuous operation. Other duties are allowed only if the temperature of the motor is controlled by reliable devices.

Duty type	Type of protection
S1*	A Motor safety switch according to IEC 60034-1 (VDE 0165/9.83) B Motor safety switch and temperature sensors in windings as additional protection. C Only temperature sensors as major protection only allowed if motor is tested and certified and if all control devices (power supplies) used are certified.
S2/S3*	D Motor safety switch with switch-on time control and/or temperature sensors in windings as additional protection. E Temperature sensors in windings as major protection. Only allowed if motor is tested and certified and if all control devices (power supplies) used are certified.
S4, S5, S6, S7, S8*	F Temperature sensors in windings. Motor must be tested and only certified control devices may be used.
Power supply by means of frequency converters	G Thermal protection of motor by means of sensors in windings is allowed as the only (independent) protection if motor is tested at all power supply frequencies, maximum voltage and S1-S7 (S8) types of operation. H If motor protection and converter are tested and certified as a unit.

* For explanation of duty cycles see chapter "duty cycles".



3

Introduction

Explosion-protected electric motors are used in industrial plants with a potentially explosive atmosphere containing inflammable fumes (vapours) or gases (i. e. chemical industry, oil refineries...) as well as in mines where methane is present.

These are the three-phase, asynchronous electric motors with short-circuit rotor, explosion protected according to the CENELEC EN 60079-0, EN 60079-1, EN 60079-7 (IEC 60079-0, IEC 60079-1) standards.

The enclosures of electric motors are designed to be "flameproof" according to EN 60079-0 (IEC 60079-1). The terminal boxes could also be in "flameproof" design or also in "increased safety" design according to EN 60079-7 (IEC 60079-7).

The following regulations and standards have been considered in designing, manufacturing and testing of electric motors:

Standard	IEC international	EN-CENELEC Europe
Rotating electric machines - classification of insulation materials for electric machines	IEC 60034-1	EN 60034-1
Climatic protection (IP number) Protection against harmful contact and ingress of solids	IEC 60034-5	EN 60034-5
Cooling devices for electric machines	IEC 60034-6	EN 60034-6
Construction and mounting of electric rotating machines	IEC 60034-7	EN 60034-7
Marking of terminals and directions of rotating of electric machines	IEC 60034-8	EN 60034-8
Noise levels	IEC 60034-9	EN 60034-9
Starting performances of short-circuit motors at 50 Hz and voltages up to 660 V	IEC 60034-12	EN 60034-12
Limited vibration levels for electric machines	IEC 60034-14	EN 60034-14
Relation between terminal sizes and ratings of three-phase short-circuit surface-cooled electric motors	IEC 60072-1, DIN 42673/3	
Relation between terminal sizes and ratings for arrangements: IM B5, IM B10, IM B14	IEC 60072-2	

European Directives

Description	Directive
Directive for explosive atmospheres (ATEX)	94/9/EC, 1999/92/EL
Electromagnetic Compatibility (EMC)	2004/108/EC
Low Voltage Directive (LVD)	2006/95/EC
Machinery Directive	2006/42/EC
Packing and packaging waste	2005/20/EC



4

Construction

Explosion protection standards taken into consideration during manufacturing and testing

Standard	IEC international	EN-CENELEC Europe
Electric devices operating in explosive atmospheres Standard type	IEC 60079-0	EN 60079-0
Electric devices operating in explosive atmospheres flameproof "d"	IEC 60079-1	EN 60079-1
Electric devices operating in explosive atmospheres Increased safety "e"	IEC 60079-7	EN 60079-7

Construction

Electric motors are of totally enclosed, fancooled (blow-over) type. Cooling is provided by fans blowing external air over the ribbed outside surface (cooling system IC 411 according to IEC 60034-6 or EN 60 034-6). Electric motors up to 250 frame size are made of grey cast iron. Motors frame sizes of 280 and 315 are made of welded housing and the terminal boxes of grey cast iron.


Materials							
Frame size	Stator		Shield	Terminal box	Flange	Fan cover	Fan
	Stator frame	Feet					
63	Cast iron	Cast iron-screw on feet	Cast iron	Cast iron	Cast iron	Stell sheet-extruded	Plastic
71							
80							
90							
100							
112							
132							
160							
180							
200							
225							
250						Stell sheet-welded	Stell sheet-welded
280							
315							



Dimensions


Cast iron

Frame size:
63 mm to 71 mm

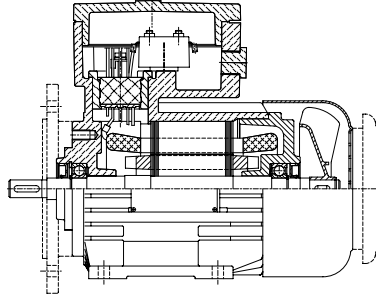


Cast iron

Frame size:
80 mm to 132 mm

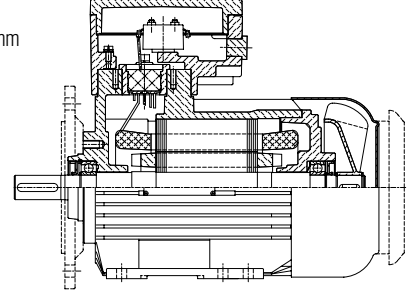


Cast iron

Frame size:
160 mm to 250 mm

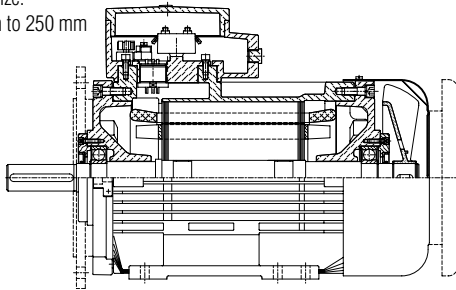

Welded

Frame size:
280 mm to 315 mm

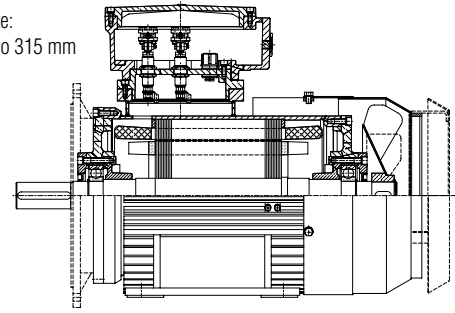

Type codes

Example

4KTC	132	SB	2/4	B5	
					Type
					Frame size
					Power rating (package length)
					Number of poles (speed)
					Customer - tailored version on special request



Bearings

Bearing lubrication

The following table lists the bearings used in the different motors. The bearings last about 20.000 hours in 4, 6 and 8 pole motors if the loads do not exceed the values indicated in the tables on pages 12 and 13.

Only the latest and most innovative bearings of known producers have been used in our motors. On customer request we equip the motors with other bearings (depends on the respective construction!).

The rotors are standard constructions and fixed on the D-end (frame size 71 mm to 250 mm) and NDE-end (frame size 280 mm to 315 mm).

Bearing









Frame size	Poles	DE bearing	NDE bearing	Bearing dishes
63	2 to 8	6201 2Z C3	6201 2Z C3	12 x 32 x 10
71	2 to 8	6203 2Z C3	6203 2Z C3	17 x 40 x 12
80	2 to 8	6204 2Z C3	6204 2Z C3	20 x 47 x 14
90	2 to 8	6205 2Z C3	6205 2Z C3	25 x 52 x 15
100	2 to 8	6206 2Z C3	6206 2Z C3	30 x 62 x 16
112	2 to 8	6206 2Z C3	6206 2Z C3	30 x 62 x 16
132	2 to 8	6208 2Z C3	6208 2Z C3	40 x 80 x 18
160	2 to 8	6309 2Z C3	6309 2Z C3	45 x 100 x 25
180	2 to 8	6310 2Z C3	6310 2Z C3	50 x 110 x 27
200	2 to 8	6312 2Z C3	6312 2Z C3	60 x 130 x 31
225	2 to 8	6313 2Z C3	6313 2Z C3	65 x 140 x 33
250	2 to 8	6314 2Z C3	6314 2Z C3	70 x 150 x 35
280	2 to 8	6316 2Z C3	6316 2Z C3	80 x 170 x 39
315	2 to 8	NU 317 C3 *6317 2Z C3	6317 2Z C3	85 x 180 x 41

*on request:

* roller bearings from frame size 160

** isolated bearing from frame size 250

Bearing assemblies

	4KTC 63 to 132	4KTC 160 to 250	4KTC 280	4KTC 315
Drive end				
Non-drive end				



Bearing lubrication

Motors are normally fitted with permanently greased bearings of Type 2Z. According to experience the filled in grease will be sufficient for several years.

Motors fitted with grease nipples

Motors from frame size 160 and above can be fitted with regreasable bearings. For motors with lubrication system we recommend not to exceed lubrication interval of two years in any case. Lubricate the motor when operational. If the motor is fitted with a lubrication plate, use values given, or use values given in the table below. These values are according to L1 – principle.

The effectiveness of motor lubrication should be checked by measuring the surface temperature of bearing endshield during normal operating conditions. If the measured temperature is +80 °C or above, the relubrication intervals must be shortened. Relubrication interval should be halffened for every 15 K increase in bearing temperature. If this is not possible then use the lubricants suitable for high operation temperature conditions.

Ball Bearing: Lubrication intervals in duty hours

Frame size	Amount of Grease	Speed of the motor [min ⁻¹]					
	[g]	3600	3000	1800	1500	1000	500
160	25	7000	9500	14000	17000	21000	24000
180	30	6000	8000	13500	16000	20000	23000
200	40	4000	6000	11000	13000	17000	21000
225	50	3000	5000	10000	12500	16500	20000
250	60	2500	4000	9000	11500	15000	18000
280	70	2000	3500	8000	10500	14000	17000
315	90	2000	3500	6500	8500	12500	16000

Roller Bearing: Lubrication intervals in duty hours

Frame size	Amount of Grease	Speed of the motor [min ⁻¹]					
	[g]	3600	3000	1800	1500	1000	500
315	45	1000	1700	3000	4300	6000	8000

At an ambient temperature of ≤ 25 °C, twice the grease life can be expected, however, 33000 hours at a maximum.

In case of frequency converters and in continous operation at very low speeds, as well as at low temperature, the lubrication capabilities of standard greases may not be sufficient and special greases with additives are needed.

If motors are equipped with sealed bearings (i. e. bearings greased for life) any deviation in the operating temperature from design temperature will result in a change in lifetime of bearings.

The use of conductive greases for elimination of bearing currents is not recommended due to their poor lubrication characteristics and low conductivity.

Regreasing or replacement of greas is only allowed with grease quality of the same kind (same saponification component or consistency).



Shaft ends

The standard electric motor is equipped with one free shaft extension. On request we also supply versions with free shaft extensions on both sides.

The dimensions of the shaft ends correspond to the IEC 60072 (1971) standard, fifth edition. Tolerances for shaft end-diameters are in accordance with DIN 7154:


- up to diameter of 50 mm/ISO k6
- more than 50 mm/ISO m6

Free shaft extensions are equipped with keyways. Keyway and key correspond to DIN 6885.

The shafts have a threaded central hole for the drawing in, drawing out and fixing connections.

Shaft diameter	14 mm	19 mm	24 mm	28 mm	38 mm	from 42 to 48 mm	from 55 to 80 mm	from 90 to 100 mm
Internal thread	M5	M6	M8	M10	M12	M16	M20	M24

Permissible loads on free shaft end

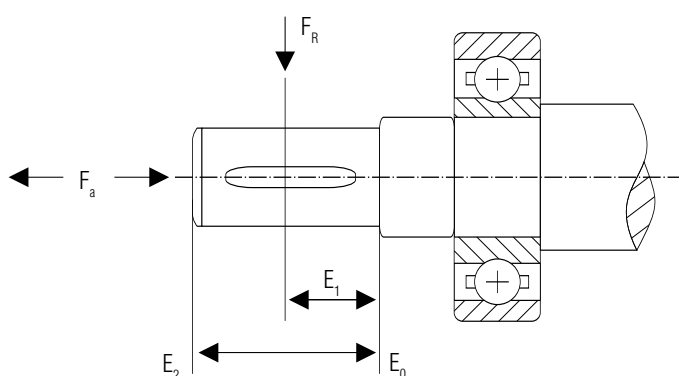

*Allowable radial force*

Frame size	Number of poles	Radial force F_R [kN]		
		E_0	E_1	E_2
63	2	0.39	0.36	0.34
	4	0.39	0.36	0.34
	6	0.44	0.41	0.38
	8	0.49	0.45	0.42
71	2	0.48	0.43	0.39
	4	0.6	0.54	0.5
	6	0.69	0.62	0.56
	8	0.76	0.68	0.62
80	2	0.64	0.57	0.51
	4	0.81	0.72	0.65
	6	0.93	0.83	0.74
	8	1.02	0.91	0.82
90	2	0.72	0.64	0.57
	4	0.9	0.8	0.71
	6	1.04	0.92	0.82
	8	1.14	1.01	0.9
100	2	1.01	0.9	0.81
	4	1.28	1.15	1.04
	6	1.45	1.3	1.17
	8	1.61	1.43	1.3
112	2	0.99	0.87	0.79
	4	1.23	1.09	1.08
	6	1.42	1.25	1.12
	8	1.57	1.39	1.24
132	2	1.56	1.38	1.23
	4	1.96	1.78	1.55
	6	2.24	1.98	1.77
	8	2.45	2.16	1.96
160	2	2.99	2.63	2.35
	4	3.83	3.38	3.02
	6	4.33	3.81	3.4
	8	4.79	4.22	3.78
180	2	3.55	3.14	2.84
	4	4.43	3.82	3.53
	6	5.1	4.52	4.08
	8	5.63	5.0	4.52
200	2	4.33	4.24	3.6
	4	4.45	4.95	4.52
	6	6.28	5.71	5.23
	8	6.88	6.25	5.72
225	2	10.4	9.45	8.32
	4	13.1	11.65	10.49
	6	15.03	13.37	12.03
	8	16.6	14.78	13.3
250	2	11.64	10.41	9.4
	4	14.77	13.22	11.96
	6	16.97	15.2	13.75
	8	18.73	16.78	15.19
280	2	14.52	13.03	11.8
	4	18.18	16.31	14.76
	6	20.93	18.78	17.02
	8	22.93	20.56	18.62
315	2	16.55	14.92	13.57
	4	20.62	18.57	16.86
	6	19.73	17.58	15.82
	8	21.93	19.56	17.62

*Maximum axial loads*

Maximum loads for free shaft extension F _A [kN]												
Mounting arrangements	IM B7	IM B8	IM B14	IM B34	IM V18	IM V19	IM V1	IM V3	IM V5	IM V6		
	IM B3	IM B35	IM B5	IMJ B6	Weight of rotor in load direction				Weight of rotor in opposite load direction			
Speed	3000	1500	1000	750	3000	1500	1000	750	3000	1500	1000	750
63	0.26	0.26	0.31	0.34	0.27	0.27	0.32	0.35	0.13	0.13	0.15	0.17
71	0.27	0.34	0.39	0.43	0.33	0.43	0.47	0.52	0.35	0.46	0.51	0.55
80	0.36	0.45	0.52	0.57	0.43	0.55	0.62	0.69	0.47	0.6	0.69	0.76
90	0.41	0.51	0.59	0.65	0.48	0.61	0.69	0.77	0.54	0.68	0.79	0.86
100	0.55	0.69	0.79	0.88	0.64	0.81	0.92	1.03	0.75	0.94	1.07	1.11
112	0.55	0.69	0.79	0.88	0.63	0.77	0.89	1.0	0.76	0.98	1.1	1.14
132	0.83	1.04	1.2	1.32	0.92	1.13	1.3	1.48	1.16	1.47	1.67	1.82
160	1.52	1.91	2.19	2.41	1.65	2.1	2.4	2.65	2.13	2.68	3.08	3.31
180	1.77	2.24	2.56	2.82	1.85	2.3	2.71	3.0	2.55	3.26	3.74	4.13
200	2.33	2.94	3.37	3.71	2.39	3.06	3.54	3.89	3.45	4.38	4.91	5.5
225	2.66	3.36	3.85	4.23	2.71	3.3	3.78	4.25	4.03	5.05	5.94	6.28
250	2.98	3.76	4.30	4.73	2.92	3.85	4.07	4.48	4.62	5.55	6.81	7.46
280	3.50	4.41	5.05	5.56	3.18	3.76	4.52	4.82	5.51	7.13	7.94	8.89
315	3.58	4.51	5.17	5.69	2.33	2.31	2.01	2.55	6.09	8.15	9.34	10.05

The load rating of bearings has been calculated for at least 20 000 operating hours at a frequency of 50 Hz. Only the axial loads have been considered. If the load is made up of axial and radial loads, the working life of the bearings is shorter.



Noise level and vibrations

Noise level

Maximum noise level L dB allowed at 1 m distance from the machine surface
Values for fan-cooled (blow-over) machines; IP 44

Power ratings P (kW)	Rotation speed min ⁻¹					
	600 < n ≤ 960	960 < n ≤ 1320	1320 < n ≤ 1900	1900 < n ≤ 2360	2360 < n ≤ 3150	3150 < n ≤ 3750
P ≤ 1.1	67	70	71	74	75	79
1.1 < P ≤ 2.2	69	70	73	78	80	82
2.1 < P ≤ 5.5	72	74	77	82	83	85
5.5 < P ≤ 11	75	78	81	86	87	90
11 < P ≤ 22	78	82	85	87	91	93
22 < P ≤ 37	80	84	86	89	92	95
37 < P ≤ 55	81	86	88	92	94	97
55 < P ≤ 110	84	89	92	93	96	98
110 < P ≤ 220	87	91	94	96	98	100

Vibrations

The noise level of electric motors is below the limits prescribed by the IEC 60034-9 recommendation for fan-cooled (blow-over) electric machines.

The rotors of electric motors are dynamically balanced with installed fan and 1/2 key. Vibration amplitude corresponds to grade A according to IEC 60034-14 (ISO 2373-N grade).

Limit values for the vibration of electric machines (IEC 60034-14)				
Vibration grade	Shaft height [mm]	56 ≤ H ≤ 132	132 < H ≤ 280	H > 280
	Mounting	Velocity [mm/s]		
A	Free suspension	1.6	2.2	2.8
	Rigid mounting	1.3	1.8	2.3
B	Free suspension	0.7	1.1	1.8
	Rigid mounting	-	0.9	1.5

Grade "A" applies to machines with no special vibration requirements

Grade "B" applies to machines with special vibration requirements



Terminal box and terminals for supply cable

Terminal box

The terminal box is fitted to the top of the motor with the cable entering from the fan end of the motor. It can be repositioned in steps of 90° to 180° to suit the application.

The motors with direct starting are equipped with 3 connection terminals. 6 connection terminals are fitted to Star-Delta, two speed and dual voltage machines.

The electric motors with sizes 71 to 132 inclusive and Ex e terminal boxes have 6 additional connection terminals for PTC sensors, heaters etc. The motors with Ex d terminal boxes are also equipped with 6 connection terminals. Exception is the 71 motor with only 4 connection terminals.

Each terminal box has one connection terminal for the protective conductor.

Ex d terminal boxes include a threaded entry to accept Ex d cable glands (see table below). Ex d thread reducers or adaptors can be included as an option for other thread sizes and thread forms.

Terminals for supply cable and cable entries				
Frame size	Terminals for a max. cross section of supply cable (mm ²)	Cable entries for main connection		
		Ex e terminal box		Ex d terminal box
		Cable glands (with Ex e cable glands)	External diameter of supply cable	Cable entries (without cable glands)
63	2.5	1 x M20 x 1.5	6 to 13	1 x M20 x 1.5
71	2.5	1 x M20 x 1.5	6.5 to 12	1 x M20 x 1.5
80 90 100	4	1 x M25 x 1.5	10 to 17	1 x M25 x 1.5
112	4	1 x M32 x 1.5	13 to 18	1 x M32 x 1.5
132	4	2 x M32 x 1.5	13 to 18	2 x M32 x 1.5
160 180	16	2 x M40 x 1.5	17 to 28	2 x M40 x 1.5
200 225	16	2 x M50 x 1.5	23 to 38	2 x M50 x 1.5
250 280 315	95 to 300	2 x M63 x 1.5	31 to 48	2 x M63 x 1.5

* Additional one cable entry (gland) M20 x 1.5 for PTC

Increased safety terminal boxes include Ex e cable glands in accordance with EN 60079-0, and EN 60079-7.

The empty entries are fitted with suitably certified stopping plugs. Additional entries can only be made in our factory under strict quality procedures.


The Ex d terminal may receive additional threaded holes (NPT, ISO 7/1) by means of adapters.

One threaded hole M20 x 1.5 is provided on the Ex d terminal boxes for the thermal protection and for heaters. Ex e terminal boxes have an additional cable gland M20 x 1.5 for cable diameters of 6 to 12 mm.




Ex e version 4 KTC


Frame size: 63 mm to 71 mm




Frame size: 80 mm to 132 mm



Frame size: 160 mm to 225 mm




Frame size: 250 mm to 315 mm

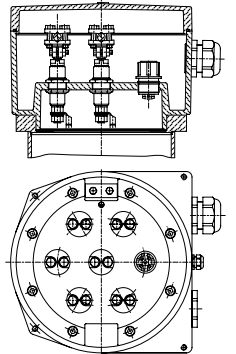


Ex d version 4 KTC


Frame size: 63 mm




Frame size: 71 mm




Frame size: 80 mm to 132 mm



Frame size: 160 mm to 225 mm



Frame size: 250 mm to 315 mm





Degrees of IP protection and coating

IP protection

IP protection of electric motors corresponds to IP 55. Motors with a higher degree of IP protection are manufactured on special request.

Protection against environmental influences IP protection	
IP protection	Protection against harmful contact and ingress of solids (1st Numeral)
IP 44	Protection against direct contact with electrically live and rotating inner parts using tools, wire or similar objects with a diameter exceeding 1 mm. Protection against ingress of solids (diameter > 1 mm). Fan air outlets and water exhausts may have a second-degree level of protection.
IP 54/IP 55/IP 56	Complete protection against contact with electrically live and moving rotating inner parts. Protection against harmful ingress of dust. Ingress of dust is not fully pre-vented, but must not reach an extent causing harmful effects to machine operation.
IP 65*	Complete protection against contact with electrically live parts and rotating inner parts. Protection against ingress of dust (dust-proof machine).
IP protection	Protection against ingress of water (2nd Numeral)
IP 44/IP 54	Water particles spraying from any direction do not have any harmful effects on the machine (i. e. rain).
IP 55/IP 65*	A jet of water spraying from any direction does not have any harmful effects on the machine.
IP 56	During rough seas water must not penetrate into the interior of the motor to such an extent as to cause damage to the machine (deck-mounted motors).

*All vertically-mounted electric motors with free shaft extension on the top must be protected against particles falling into the fan cover. This protection is not necessary if the machine itself has such a protection. Electric motors mounted outdoors must be protected against exposure to direct sunlight.

Coating

Surface protection against environmental influences			
	Anti-corrosion protection 2 (standard)	Anti-corrosion protection 3 (special)	Special surface protection
Surface	sanding and degreasing	sanding and degreasing	Products with surface protection for marine/offshore and tropical conditions are available on special request
Undercoating	Avtol	Avtol	
Intermediate Coating 1	-	Epoxy	
Intermediate Coating 2	-	Epoxy	
Finishing	Korvin	Epoxy	
Total thickness (mm)	80	140	
Colour*	blue RAL 5010	blue RAL 5010	
Protection against corrosion in environments with water	high humidity, steam, sea water	high humidity, steam, sea water	
Environments resistance	periodic spilling or spraying of anorganic acids and lyes	periodic spilling or spraying of anorganic acids and lyes	
Suitable for	normal industrial atmospheres, relatively high humidity and high content of salt and aggressive gases (SO ₂ , NO _x)	Chemically aggressive atmospheres, high content of salt and aggressive gases (SO ₂ , NO _x). Condensation of moisture and electrolytes on surface. Solvents and oil derivatives have negative effects.	

* Mining industry: yellow RAL 1003 for 500 V, grey RAL 9003 for 1000 V



Arrangements

The types of electric motors and their symbols are prescribed by the IEC 60034-7, EN 60034-7 standards. Motors are manufactured following the basic IM B3, IM B5 and IM B14 types.

Table 4 shows the symbols and mounting arrangements for the standard models manufactured by our company. IM B3 type motors can also operate in IM B6, IM B7 and IM B8 mounting positions.

IEC code I	IM B3	IM B5	IM B34	IM B14	IM B35
IEC code II	IM 1001	IM 3001	IM 2101	IM 3601	IM 2001
IEC code I	IM V6	IM V3	IM V6/IM V19	IM V19	IM V36
IEC code II	IM 1031	IM 3031		IM 3631	IM 2031
IEC code I	IM V5	IM V1	IM V5/IM V18	IM V18	IM V15
IEC code II	IM 1011	IM 3011		IM 3611	IM 2011

Explosion protection and certifications

Explosion protection

Explosion protection markings are

- frame size 63 II 2G Ex d IIC T4 or II 2G Ex de IIC T4
- frame sizes 71 to 225 II 2G Ex d IIC T4 or II 2G Ex de IIC T4
 II 2D Ex td A21 IP 65 T135 °C
- frame size 250 II 2G Ex d IIC T4 Gb or II 2G Ex de IIC T4 Gb
- frame size 280 and 315 II 2G Ex d IIC T4 or II 2G Ex de IIC T4

Certifications

4 KTC-type motors are PTB certified (Physikalisch-technische Bundesanstalt), Germany:

- PTB 07 ATEX 1036 X for frame size 63
- PTB 10 ATEX 1028 X for frame sizes 80 to 132
- PTB 10 ATEX 1006 X for frame sizes 71 and 160
- PTB 09 ATEX 1121 X for frame size 180
- PTB 09 ATEX 1119 X for frame size 200
- PTB 09 ATEX 1120 X for frame size 225
- PTB 11 ATEX 1034 X for frame size 250
- PTB 09 ATEX 1122 X for frame size 280
- PTB 09 ATEX 1123 X for frame size 315



Electrical datas

Power, voltage and frequency

The power ratings given in the tables are valid for operation under uniform, continuous load (S-1 according to IEC 60034-1, EN 60034-1) at a rated voltage, a frequency of 50 Hz, temperatures of up to +40 °C and an altitude of less than 1 000 m above sea level. The data in the tables refer to 400 V, but motors have been designed for 380 V and 415 V.

Voltage or frequency variations of +/- 5 % are allowed; within these limits the power ratings remain unchanged and the maximum winding temperature is not exceeded.

Versions using 110 V to 1 000 V and frequencies of 50 or 60 Hz are available on special request. 50 Hz, 380 V, 400 V, 415 V electric motors may also be connected to 440 V to 480 V and a frequency of 60 Hz. Then the maximum load can be increased by 15 % and the number of revolutions by approximately 20 %.

If a 50 Hz, 380 V, 400 V, 415 V electric motor is connected to a 60 Hz line, its maximum load may not exceed the nominal power. The number of revolutions increases by 20 %, while the starting and maximum torque decreases by approx. 18 %.

Overload, efficiency and power factor

Electric motors heated to the operating temperature limit resist to a 2-minute overload of 1.5 In without being damaged. Variations between the 5/4 and 3/4 of the rated load have no essential influence on efficiency and power factor.

Efficiency η (%) of the rate load				Power factor $\cos \varphi$ of the rate load			
5/4	4/4	3/4	2/4	5/4	4/4	3/4	2/4
96	96	96	94.5	0.94	0.94	0.92	0.74
95	95	95	93.3	0.94	0.93	0.92	0.68
94	94	94	92	0.92	0.92	0.89	0.65
93	93	93	91	0.91	0.91	0.88	0.64
92	92	92	90	0.9	0.9	0.87	0.63
91	91	91	89	0.89	0.89	0.88	0.6
90	90	90	87	0.88	0.88	0.85	0.58
89	89	89	86	0.88	0.87	0.84	0.57
88	88	83	85.5	0.87	0.86	0.83	0.55
86	87	87	85	0.86	0.85	0.82	0.53
85	86	86	84.5	0.86	0.84	0.81	0.51
84	85	85	84	0.85	0.83	0.8	0.49
83	84	84	83	0.85	0.82	0.78	0.47
82	83	83	81	0.83	0.81	0.76	0.45
81	82	82	80.5	0.82	0.8	0.75	0.43
79	81	81	80	0.82	0.79	0.73	0.42
78	80	80	79	0.79	0.78	0.73	0.41
77	79	79	78	0.78	0.77	0.72	0.4
76	78	78	76	0.78	0.76	0.7	0.38
75	77	77	75	0.77	0.75	0.69	0.36
74	76	76	74	0.76	0.74	0.67	0.36
73	75	75	73	0.75	0.73	0.66	0.35
72	74	74	72	0.74	0.72	0.65	0.34
71	73	73	71	0.73	0.71	0.64	0.34
70	72	72	69	0.72	0.7	0.63	0.33
69	71	71	68	0.71	0.69	0.62	0.33
68	70	70	67	0.7	0.68	0.61	0.32
67	69	69	66	0.7	0.67	0.59	0.3
66	68	67.5	64	0.68	0.66	0.57	0.3
65	67	66.5	62	0.68	0.65	0.55	0.3
64	66	65	61	0.67	0.64	0.54	0.3



Windings

Materials of thermal class F are used for the production of stator windings. They are designed to withstand an overtemperature of 80 K at a maximum ambient temperature of +40 °C. Electric motors operating under heavy conditions, conditions requiring frequent start-ups or ambient temperatures above +40 °C employ special insulation (thermal class H) and are available on special request. Windings of electric motors rated up to 3 kW are connected via star, while those of high-rated motors employ delta connection. Two-speed motors with 2:1 speed ratio use Dahlander windings. Electric motors with a pole relation of 4/6 or 8/6 have two separate stator windings in star connection.

Wiring diagram	Ex d	Ex e	Ex d and Ex e terminal box	Ex d	Ex e
Single speed Start with Y-D switch, remove Y-D jumper					
Y-D-jumper in Y-connection for direct coupling			Y-D-jumper in D-connection for direct coupling		
Pole-changing					
Low speed			High speed		
Pole-changing (Dahlander)					
Low speed			High speed		
Pole-changing (Dahlander)					
Low speed			High speed		

Installation instructions

for the mains connection and start-up of motors with Ex d terminal box.

Connect the motors via suitable cable and line entries that correspond to the EN 60079 directives, paragraphs 12.1 and 12.2 and have a separate test certificate. Unused openings must be closed as prescribed by EN 60079, paragraph 12.5. Cable and line entries (heavy-gauge conduit threads) and sealing plugs that do not meet these requirements must not be used.



Test and tolerance band of the rated values

Electric motors are tested in accordance with IEC 60034-2, EN 60034-2 regulations. All nominal and start-up value deviations are within the limits prescribed by IEC 60034-1, EN 60034-1.

The explosion-proof enclosure is tested according to the IEC 60034-1, EN 60034-1 regulations. All enclosure parts are tested with a water pressure of 1 000 kPa.

Rated values under extreme working conditions

When electric motors are used at temperatures above +40 °C or at altitudes of more than 1 000 m, the permitted overtemperature for windings is lower; the rated power is reduced respectively. The relation between rated power and ambient temperature altitude is shown in the diagrams.

Tolerances of rated values

The rated values shown in the tables may vary according to IEC 60034-1, EN 60034-1.

Performance

Rated power ≤ 50 kW - 0.15 (1- η)
 > 50 kW - 0.10 (1- η)

Power factor $- \frac{1 - \cos \phi}{6}$


Slip at rated load and machine heated to operating temperature + 20 % of rated slip

Starting torque - 15 % of rated value + 25 %


Maximum torque - 10 % of rated value

Starting current + 20 % lower limit not prescribed

Power reduction as temperatures rise

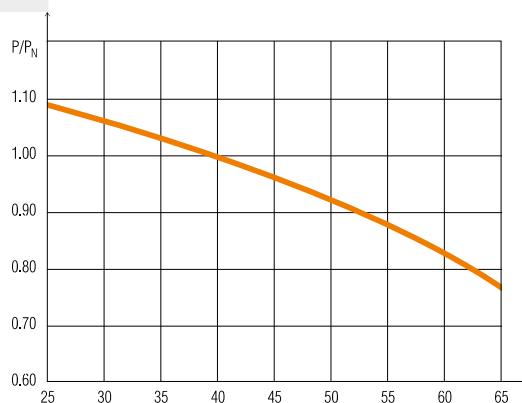

Power reduction at less cooling

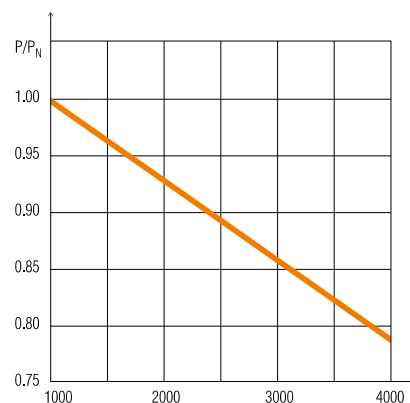



Start-up characteristics

Start-up torque and current are the actual values the motor develops and the current values that cross the power supply cable when voltage is applied to the electric motor. The charts below show the values for both start-up torque and peak torque as well as the start-up current given as multiple of the nominal values.

Motor torque classification

For the right choice of the motor you not only have to know starting and maximum torque but also the torque curve and speed. To avoid the plotting of torque curves which are unique for each type of motor, the rotor torque class is defined as one of the electric motor's characteristics. This way the suitable motor can be chosen without the (exact) knowledge of the course of the torque curve.




The motor torque class shows the maximum counter-torque for starting the motor. The starting torque class is specified according to the nominal voltage. In this catalog we distinguish three classes:

KR 10

KR 13

KR 16

The titles of the torque classes contain numbers which correspond to one tenth (1/10) of the maximum counter-torque value necessary to start up the motor. The following illustrations represent the torque curves of the classes KR 10, KR 13 and KR 16.

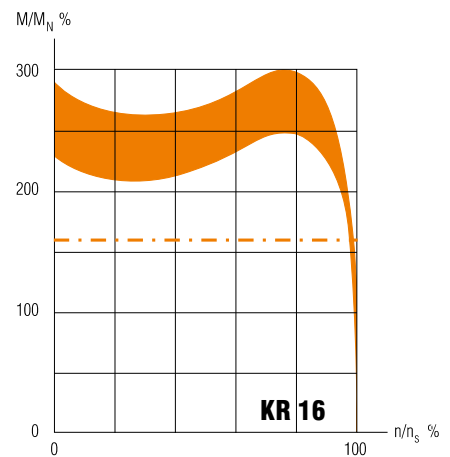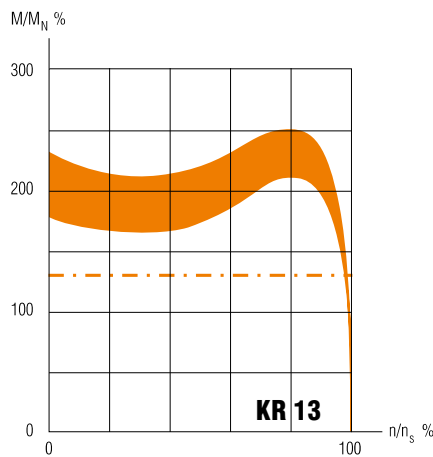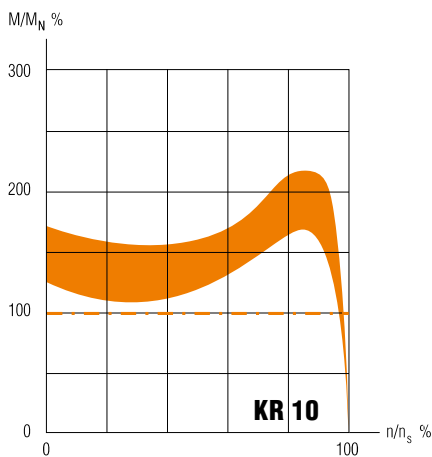




Duty cycles

S1 Continuous duty

Operation under constant load, lasting long enough to allow the machine to reach thermal equilibrium.

Designation: **S1**

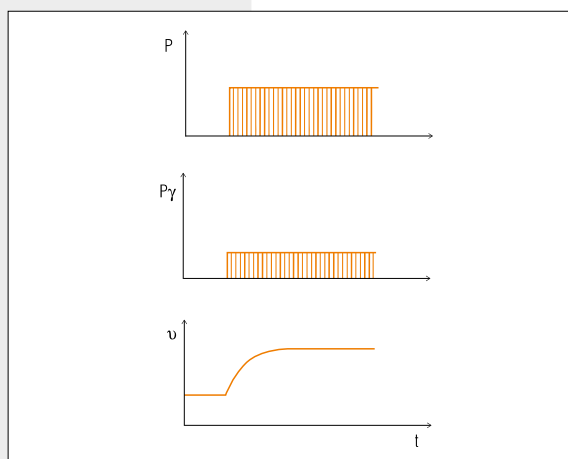


S2 Short-time duty

Operation under constant load, for a time **too short** to allow the machine to reach thermal equilibrium. Idle time of the machine is long enough to allow the machine to cool down to ambient temperature.

Standard duration of short-term operation:
10, 30, 60 and 90 minutes.


Designation: **S2** 30 minutes.

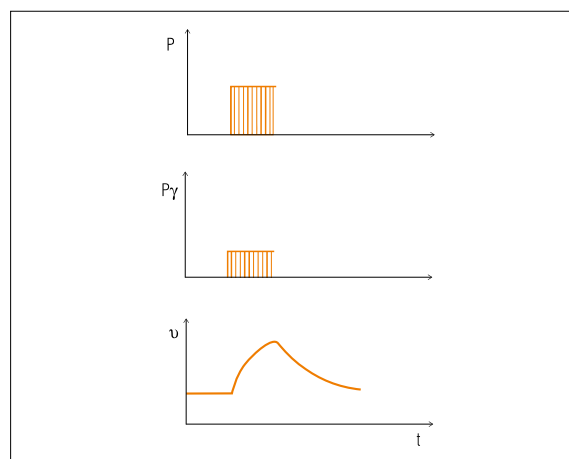

S3 Intermittent periodic duty

Operation under repeated, constant load in specified cycles. Neither operating nor resting period are long enough to allow the motor to reach thermal equilibrium. The starting losses are small and do not essentially influence the temperature rise. The nominal values of relative starting time are 15, 25, 40, 60 % at a daily 10-minute cycle.

Designation: **S3** 25 %

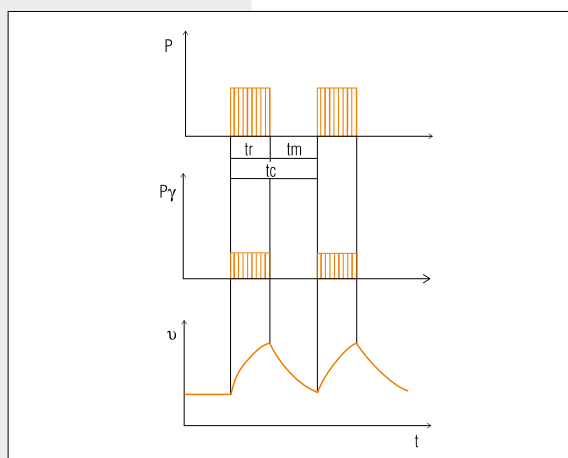


S4 Intermittent periodic duty

Operation under repeated, constant load in specified cycles. The start of the motor influences the temperature rise.

In order to define this type of operation, the number of cycles (starts per hour) and inertia constant must also be known.


Designation: **S4** 40 %; 120 starts/h; F12

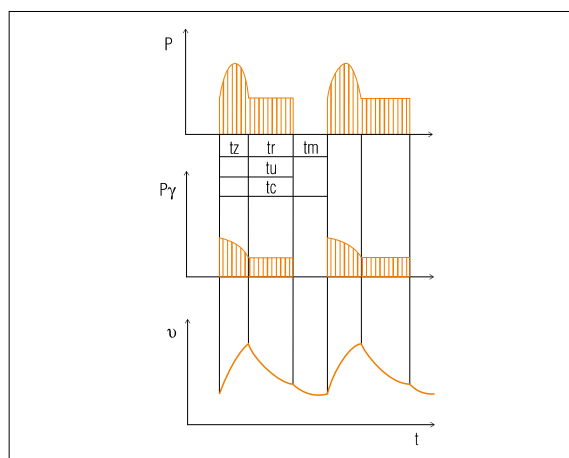

S5 Intermittent periodic duty

Same as S4 operation, except that the electric braking of the machine has an essential influence on the temperature rise.

Designation: **S5** 160 %; 120 starts/h; FI2

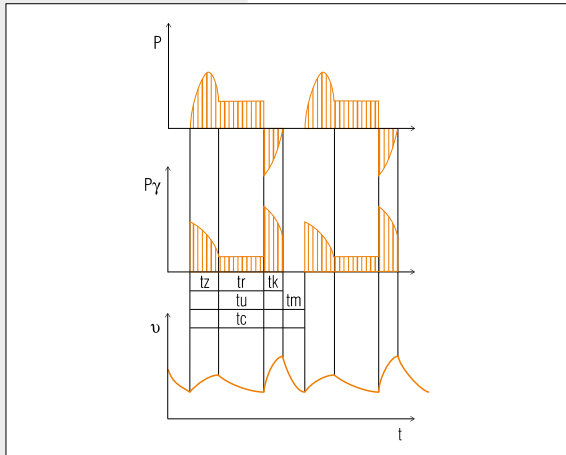


S6 Continuous operation with cyclic load

Operation consisting of a continuous series of equal cycles. Each cycle is made up of a no-load and a constant load period.

The cycle duration is not long enough to allow the machine to reach thermal equilibrium in one cycle.

In order to define S6 operation, the relative starting time must be specified.


Designation: **S6** 15 %

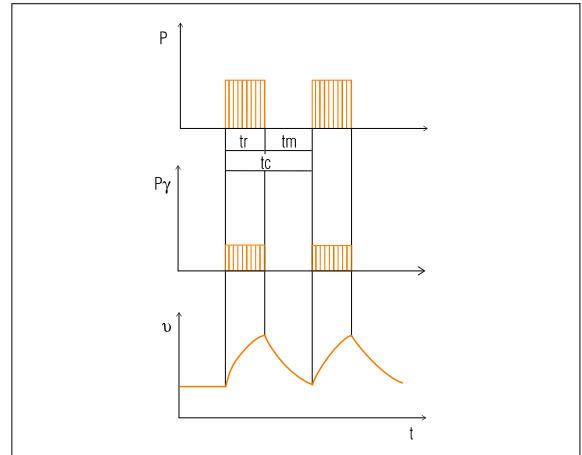

S7 Intermittent periodic duty with starting and braking

Uninterrupted operation with a series of constant loading and braking periods. The most demanding type of operation for the motor. In order to define this type of operation, the number of cycles per hour and the inertia constant must be specified.

Designation: **S7** 500 starts/h; FI3

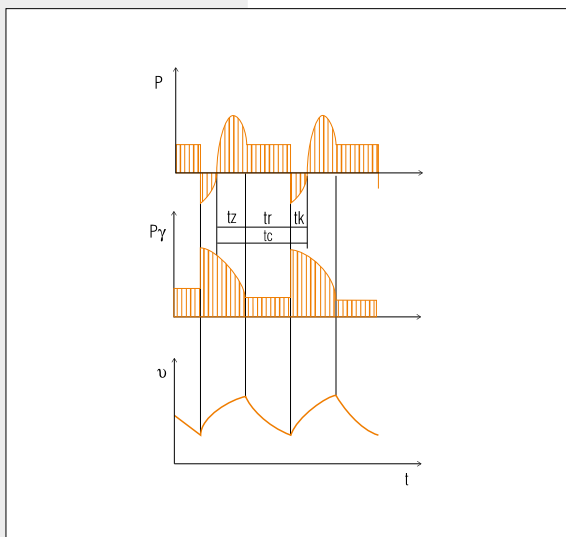


S8 Intermittent periodic duty with pole changing

This type of operation only exists with pole amplitude modulated motors. In this case the definition of operation must contain the following data for each pole:

- number of starts per hour
- inertia constant
- relative operating period

Designation: **S8** 30 starts/h; FI10; 740 min⁻¹; 40 %

S8 30 starts/h; FI10; 960 min⁻¹; 60 %

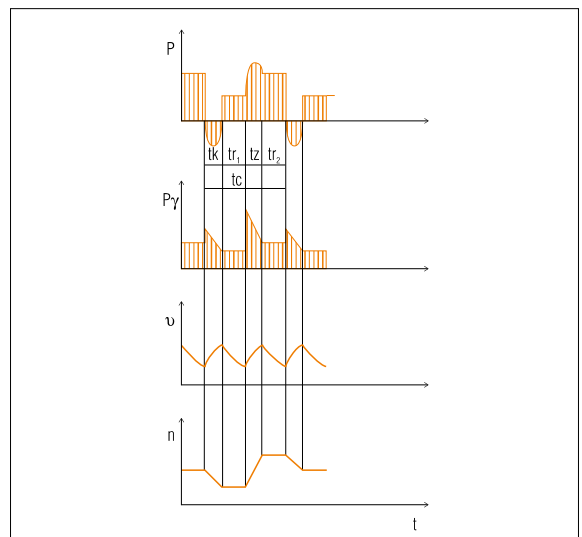

S9 Continuous operation with non-periodic load and speed variation (e. g. converter operation)



Tables with ratings for single-speed motors - 50 Hz

Three-phase motor with short-circuit rotor

Pole number 2

220 to 240 V/380 to 415 V 50 Hz
380 to 415 V/660 to 690 V 50 Hz

Protection class IP 55
Temperature class T1 to T4
Thermal class F

Explosion protection  II 2G Ex d IIC T4,  II 2G Ex de IIC T4,  II 2D Ex tD A21 IP 65 T135 °C														
Type	4KTC or 4KTCD											5KTC	4KTC	
Frame size	63	71	80	90	100	112	132	160	180	200	225	250	280	315
PTB 07 ATEX 1036 X														
PTB 10 ATEX 1006 X														
PTB 10 ATEX 1028 X														
PTB 09 ATEX 1121 X														
PTB 09 ATEX 1119 X														
PTB 09 ATEX 1120 X														
PTB 11 ATEX 1034 X														
PTB 09 ATEX 1122 X														
PTB 09 ATEX 1123 X														

Selection chart

Type	Power kW	Speed min ⁻¹	In 400 V A	Efficiency %	Power factor cos φ	Torque Nm	Starting torque (MA/MN)	Starting current (IA/IN)	Max. torque (MM/MN)	KR	Moment of inertia (kgm ²)	Weight kg
4KTC 63 A-2	0.18	2750	0.52	64.4	0.77	0.63	3.0	3.9	2.9	16	0.00014	13
4KTC 63 B-2	0.25	2765	0.67	67.3	0.80	0.87	2.5	4.2	2.7	16	0.00019	14
4KTC 71 A-2	0.37	2820	0.98	67.2	0.81	1.25	3	5.4	3.2	16	0.00034	15
4KTC 71 B-2	0.55	2800	1.28	72.7	0.86	1.88	2.8	5.4	3.1	16	0.00042	16
4KTC 80 A-2	0.75	2810	1.61	77.5	0.87	2.55	2.6	4.9	2.8	16	0.00063	24
4KTC 80 B-2	1.1	2775	2.29	78.8	0.88	3.78	2.8	5.1	2.9	16	0.00079	26
4KTC 90 S-2	1.5	2855	3.07	81.6	0.86	5.0	2.8	6.1	3.1	16	0.00124	32
4KTC 90 L-2	2.2	2845	4.4	80.8	0.89	7.4	2.7	5.9	2.7	16	0.00155	34
4KTC 100 L-2	3.0	2875	6.4	79.5	0.85	10.0	3.0	5.7	3.3	16	0.00251	42.5
4KTC 112 M-2	4.0	2880	7.8	84.0	0.88	13.3	2.7	6.9	3.1	16	0.00451	58
4KTC 132 SA-2	5.5	2910	10.4	87.0	0.88	18.1	2.6	6.3	3.0	16	0.00967	77
4KTC 132 SB-2	7.5	2920	14.1	87.7	0.88	24.5	3.0	6.9	3.3	16	0.01225	84
4KTC 160 MA-2	11.0	2940	20.6	89.4	0.86	35.8	3.8	7.9	3.3	16	0.02943	148
4KTC 160 MB-2	15.0	2940	26.5	90.6	0.9	48.7	3.4	7.9	3.0	16	0.03912	166
4KTC 160 L-2	18.5	2945	32.2	91.6	0.91	60.0	3.1	7.4	3.1	16	0.0459	178
4KTC 180 M-2	22.0	2940	41.3	84.2	0.91	71.5	2.8	6.9	2.9	16	0.06151	205
4KTC 200 LA-2	30.0	2955	54.4	88.5	0.9	97.0	2.4	6.9	2.6	16	0.10442	240
4KTC 200 LB-2	37.0	2970	66.5	88.6	0.91	119.1	3.3	9.0	3.0	16	0.12739	250
4KTC 225 M-2	45.0	2970	82.0	89.6	0.88	145.0	2.5	7.6	3.4	16	0.22155	375
5KTC 250 M-2	55.0	2970	98.0	89.3	0.91	177.0	2.1	6.6	2.2	16	0.675	485
4KTC 280 S-2	75.0	2980	136.0	90.8	0.88	241.0	3.0	8.3	2.7	16	0.95	650
4KTC 280 M-2	90.0	2980	158.0	91.5	0.9	289.0	3.0	8.1	2.6	16	1.1	700
4KTC 315 S-2	110.0	2970	186.0	91.5	0.94	353.0	2.5	7.2	3.1	13	1.55	820
4KTC 315 MA-2	132.0	2985	223.0	92.1	0.93	425.0	2.8	7.5	2.8	13	1.8	930
4KTC 315 MB-2	160.0	2975	272.4	90.1	0.94	515	2.9	8.1	3.1	13	2.2	1240
4KTC 315 L-2	200.0	2980	345.0	93.0	0.90	640	2.3	6.9	2.6	13	2.8	1380



Three-phase motor with short-circuit rotor

Pole number 4

220 to 240 V/380 to 415 V 50 Hz
380 to 415 V/660 to 690 V 50 Hz

Protection class IP 55
Temperature class T1 to T4
Thermal class F

Explosion protection II 2G Ex d IIC T4, II 2G Ex de IIC T4, II 2D Ex td A21 IP 65 T135 °C													
Type	4KTC or 4KTCd											5KTC	4KTC
Frame size	63	71	80	90	100	112	132	160	180	200	225	250	280 315
PTB 07 ATEX 1036 X	●												
PTB 10 ATEX 1006 X		●						●					
PTB 10 ATEX 1028 X			●	●	●	●	●						
PTB 09 ATEX 1121 X									●				
PTB 09 ATEX 1119 X										●			
PTB 09 ATEX 1120 X											●		
PTB 11 ATEX 1034 X												●	
PTB 09 ATEX 1122 X													●
PTB 09 ATEX 1123 X													●

Selection chart

Type	Power	Speed	In 400 V	Efficiency	Power factor	Torque	Starting torque	Starting current	Max. torque	KR	Moment of inertia	Weight
	kW	min ⁻¹	A	%	cos φ	Nm	(MA/MN)	(IA/IN)	(MM/MN)		(kgm ²)	kg
4KTC 63 A-4	0.12	1345	0.42	59.5	0.69	0.83	2.2	2.8	2.3	16	0.00021	13
4KTC 63 B-4	0.18	1370	0.61	64.8	0.65	1.25	2.5	3.2	2.5	16	0.00029	14
4KTC 71 A-4	0.25	1370	0.69	67.0	0.78	1.74	2.15	3.8	2.2	16	0.00051	15
4KTC 71 B-4	0.37	1385	0.95	72.5	0.78	2.55	2.15	4.0	2.3	16	0.00063	16
4KTC 80 A-4	0.55	1405	1.3	80.4	0.76	3.73	2.7	5.2	2.9	16	0.00098	24
4KTC 80 B-4	0.75	1380	1.65	80.8	0.82	5.19	2.1	4.6	2.4	16	0.00125	26
4KTC 90 S-4	1.1	1410	2.4	80.9	0.82	7.5	2.15	4.8	2.5	16	0.00204	32
4KTC 90 L-4	1.5	1415	3.35	80.6	0.8	10.1	2.5	5.2	2.8	16	0.0026	35
4KTC 100 LA-4	2.2	1410	4.7	81.5	0.82	14.9	2.0	4.6	2.5	16	0.00388	42.5
4KTC 100 LB-4	3.0	1415	6.5	79.6	0.83	20.2	2.1	5.0	2.6	16	0.00499	46
4KTC 112 M-4	4.0	1435	8.3	85.4	0.81	26.6	2.8	6.1	3.1	16	0.01014	60
4KTC 132 S-4	5.5	1435	10.8	86.0	0.85	36.6	2.2	5.1	2.4	16	0.02113	84
4KTC 132 M-4	7.5	1445	14.5	88.9	0.84	49.5	2.5	6.0	2.8	16	0.02793	93.5
4KTC 160 M-4	11.0	1460	22.0	87.1	0.83	71.8	2.9	6.9	3.1	16	0.05417	159
4KTC 160 L-4	15.0	1465	29.0	90.8	0.83	97.8	3.1	7.4	3.0	16	0.07116	178
4KTC 180 M-4	18.5	1465	35.0	89.9	0.86	120.6	3.1	6.9	2.5	16	0.1129	215
4KTC 180 L-4	22.0	1470	40.5	90.9	0.86	143.2	3.1	7.1	2.6	16	0.1339	236
4KTC 200 L-4	30.0	1470	53.4	89.6	0.91	195.1	2.7	6.8	2.8	16	0.21298	250
4KTC 225 S-4	37.0	1475	66.6	92.2	0.87	239.7	2.9	7.0	2.4	16	0.36225	310
4KTC 225 M-4	45.0	1475	80.5	92.5	0.87	291.0	3.3	7.3	2.7	16	0.42845	390
5KTC 250 M-4	55.0	1480	98.0	92.5	0.89	355.0	3.4	7.7	2.7	16	0.875	480
4KTC 280 S-4	75.0	1485	138.0	92.2	0.84	482.0	3.0	7.6	2.4	16	1.875	610
4KTC 280 M-4	90.0	1490	166.0	93.5	0.84	578.0	2.8	7.8	2.6	16	2.25	685
4KTC 315 S-4	110.0	1485	207.0	90.7	0.84	706.0	2.6	6.3	2.5	16	3.5	820
4KTC 315 MA-4	132.0	1485	235.0	92.2	0.88	851.0	3.0	6.9	2.5	16	3.875	930
4KTC 315 MB-4	160.0	1490	298.0	92.5	0.84	1027.0	1.9	5.8	2.1	16	5.0	1240
4KTC 315 L-4	200.0	1485	351.5	93.0	0.88	1285.0	1.5	6.8	1.6	16	6.1	1380



Three-phase motor with short-circuit rotor

Pole number 6

220 to 240 V/380 to 415 V 50 Hz
380 to 415 V/660 to 690 V 50 HzProtection class IP 55
Temperature class T1 to T4
Thermal class F

Explosion protection  II 2G Ex d IIC T4,  II 2G Ex de IIC T4,  II 2D Ex tD A21 IP 65 T135 °C													
Type	4KTC or 4KTCD										5KTC	4KTC	
Frame size	63	71	80	90	100	112	132	160	180	200	225	250	280 315
PTB 07 ATEX 1036 X	●												
PTB 10 ATEX 1006 X		●						●					
PTB 10 ATEX 1028 X			●	●	●	●	●						
PTB 09 ATEX 1121 X									●				
PTB 09 ATEX 1119 X										●			
PTB 09 ATEX 1120 X											●		
PTB 11 ATEX 1034 X												●	
PTB 09 ATEX 1122 X													●
PTB 09 ATEX 1123 X													●

Selection chart

Type	Power kW	Speed min ⁻¹	In 400 V A	Efficiency %	Power factor cos φ	Torque Nm	Starting torque (MA/MN)	Starting current (IA/IN)	Max. torque (MM/MN)	KR	Moment of inertia (kgm ²)	Weight kg
4KTC 63 A-6	0.09	895	0.43	51.0	0.61	0.96	2.2	2.3	2.3	16	0.00031	13
4KTC 63 B-6	0.12	900	0.52	55.0	0.60	1.27	2.5	2.5	2.5	16	0.00042	14
4KTC 71 A-6	0.18	930	0.67	60.0	0.65	1.86	2.1	3.1	2.3	16	0.00081	15
4KTC 71 B-6	0.25	940	0.85	64.0	0.67	2.56	2.2	3.7	2.5	16	0.00101	16
4KTC 80 A-6	0.37	925	1.1	67.0	0.72	3.83	2.3	3.6	2.5	16	0.00191	25
4KTC 80 B-6	0.55	915	1.5	72.0	0.74	5.7	2.35	4.1	2.5	16	0.00239	26.5
4KTC 90 S-6	0.75	915	2.1	70.0	0.74	7.8	1.8	3.7	2.1	16	0.00323	32
4KTC 90 L-6	1.1	915	3.0	73.0	0.73	11.5	2.1	4.1	2.3	16	0.00419	35
4KTC 100 L-6	1.5	930	3.7	76.0	0.77	15.4	2.2	4.7	2.3	16	0.00657	46
4KTC 112 M-6	2.2	960	5.0	82.0	0.78	21.9	2.6	6.1	2.7	16	0.0158	60
4KTC 132 S-6	3.0	975	6.6	83.5	0.79	29.4	2.3	6.3	2.5	16	0.02722	84
4KTC 132 MA-6	4.0	960	8.8	83.0	0.8	39.9	2.4	6.3	2.9	16	0.03229	88
4KTC 132 MB-6	5.5	955	11.8	83.5	0.81	55.1	2.3	6.1	2.9	16	0.03838	95
4KTC 160 M-6	7.5	970	15.8	86.0	0.8	74.2	2.7	6.7	2.4	16	0.08121	161
4KTC 160 L-6	11.0	965	23.5	88.5	0.77	109.0	2.2	6.0	2.3	16	0.10916	182
4KTC 180 L-6	15.0	965	31.0	89.5	0.78	148.0	1.9	5.2	2.3	16	0.227	236
4KTC 200 LA-6	18.5	965	36.0	91.0	0.81	183.0	1.9	6.0	2.4	16	0.24369	240
4KTC 200 LB-6	22.0	965	43.0	91.5	0.81	218.6	1.9	6.0	2.4	16	0.27888	250
4KTC 225 M-6	30.0	975	56.0	92.5	0.83	293.0	1.8	5.8	2.5	16	0.66117	390
5KTC 250 M-6	37.0	985	69.0	93.5	0.83	359.0	2.8	6.0	2.6	16	1.125	480
4KTC 280 S-6	45.0	985	82.0	94.5	0.84	437.0	2.5	6.3	2.7	16	2.3	610
4KTC 280 M-6	55.0	985	101.0	94.5	0.84	534.0	2.4	6.0	2.8	16	2.625	685
4KTC 315 S-6	75.0	980	140.0	95.0	0.82	732.0	2.5	5.9	2.8	16	4.625	820
4KTC 315 MA-6	90.0	985	163.0	95.5	0.84	874.0	2.1	5.1	2.9	16	5.25	930
4KTC 315 MB-6	110.0	990	198.0	91.5	0.88	1060.0	2.5	6.5	2.4	16	6.0	1240
4KTC 315 L-6	132.0	990	238.0	90.5	0.88	1275.0	2.6	6.8	2.4	16	7.3	1380



Three-phase motor with short-circuit rotor

Pole number 8

220 to 240 V/380 to 415 V 50 Hz
380 to 415 V/660 to 690 V 50 Hz

Protection class IP 55
Temperature class T1 to T4
Thermal class F

Explosion protection II 2G Ex d IIC T4, II 2G Ex de IIC T4, II 2D Ex tD A21 IP 65 T135 °C													
Type	4KTC or 4KTCd											5KTC	4KTC
Frame size	63	71	80	90	100	112	132	160	180	200	225	250	280 315
PTB 07 ATEX 1036 X	●												
PTB 10 ATEX 1006 X		●						●					
PTB 10 ATEX 1028 X			●	●	●	●	●						
PTB 09 ATEX 1121 X									●				
PTB 09 ATEX 1119 X										●			
PTB 09 ATEX 1120 X											●		
PTB 11 ATEX 1034 X												●	
PTB 09 ATEX 1122 X													●
PTB 09 ATEX 1123 X													●

Selection chart

Type	Power	Speed	In 400 V	Efficiency	Power factor	Torque	Starting torque	Starting current	Max. torque	KR	Moment of inertia	Weight
	kW	min ⁻¹	A	%	cos φ	Nm	(MA/MN)	(IA/IN)	(MM/MN)		(kgm ²)	kg
4KTC 63 B-8	0.06	600	0.39	31.0	0.73	0.80	1.4	1.7	1.4	16	0.0002	14
4KTC 71 A-8	0.09	680	0.67	38.0	0.51	1.26	2.0	2.0	2.1	16	0.00081	15
4KTC 71 B-8	0.12	655	0.54	45.0	0.71	1.75	1.8	2.4	2.1	16	0.00101	16
4KTC 80 A-8	0.18	680	0.66	61.0	0.65	2.53	2.1	2.9	2.2	16	0.00191	25
4KTC 80 B-8	0.25	680	0.92	58.0	0.68	3.52	2.1	3.1	2.3	16	0.00239	26.5
4KTC 90 S-8	0.37	685	1.25	66.0	0.65	5.2	1.7	3.0	2.0	16	0.00323	32
4KTC 90 L-8	0.55	685	1.75	69.0	0.66	7.7	1.75	3.1	2.1	16	0.00419	35
4KTC 100 LA-8	0.75	690	2.3	69.0	0.69	10.4	1.8	3.5	2.1	16	0.00657	42.5
4KTC 100 LB-8	1.1	695	3.25	70.0	0.7	15.0	1.9	3.8	2.2	16	0.00857	46
4KTC 112 M-8	1.5	710	4.15	78.0	0.67	20.2	2.0	4.3	2.5	16	0.0158	60
4KTC 132 S-8	2.2	710	5.5	79.0	0.74	29.6	1.9	4.3	2.2	16	0.02606	79
4KTC 132 M-8	3.0	710	7.2	80.0	0.76	40.4	2.1	4.8	2.3	16	0.03446	85
4KTC 160 MA-8	4.0	720	10.0	82.6	0.71	53.1	1.8	4.8	2.3	16	0.0688	146
4KTC 160 MB-8	5.5	715	13.4	84.0	0.71	73.6	1.8	4.8	2.1	16	0.08939	160
4KTC 160 L-8	7.5	725	16.7	86.5	0.75	98.8	2.3	5.8	2.1	16	0.12027	182
4KTC 180 L-8	11.0	715	25.0	86.7	0.74	147.0	1.8	4.2	2.5	16	0.227	236
4KTC 200 L-8	15.0	720	29.0	91.0	0.82	196.0	2.1	4.5	2.5	16	0.37827	250
4KTC 225 S-8	18.5	710	37.0	91.0	0.79	249.0	2.1	4.6	2.6	16	0.57008	310
4KTC 225 M-8	22.0	715	45.0	91.5	0.77	294.0	2.1	4.6	2.6	16	0.67806	390
5KTC 250 M-8	30.0	730	59.0	92.8	0.79	398.0	1.7	5.4	2.4	16	1.175	480
4KTC 280 S-8	37.0	730	74.0	93.0	0.78	485.0	1.9	6.0	2.3	16	2.3	610
4KTC 280 M-8	45.0	735	90.0	93.5	0.78	586.0	1.9	6.4	2.7	16	2.625	685
4KTC 315 S-8	55.0	735	104.0	94.5	0.81	716.0	2.2	6.2	2.3	16	4.625	820
4KTC 315 MA-8	75.0	740	140.0	94.5	0.82	969.0	1.8	6.3	2.1	16	5.25	930
4KTC 315 MB-8	90.0	740	173.0	91.1	0.83	1160.0	2.5	6.7	2.5	16	6.0	1240
4KTC 315 L-8	110.0	740	213.0	90.0	0.83	1420.0	2.6	6.9	2.5	16	7.3	1380



Tables with ratings for single-speed motors - 60 Hz

Three-phase motor with short-circuit rotor

Pole number 2

440 to 480 V 60 Hz

Protection class

IP 55

Temperature class

T1 to T4

Thermal class

F

Explosion protection  II 2G Ex d IIC T4,  II 2G Ex de IIC T4,  II 2D Ex tD A21 IP 65 T135 °C														
Type	4KTC or 4KTCD											5KTC	4KTC	
Frame size	63	71	80	90	100	112	132	160	180	200	225	250	280	315
PTB 07 ATEX 1036 X														
PTB 10 ATEX 1006 X														
PTB 10 ATEX 1028 X														
PTB 09 ATEX 1121 X														
PTB 09 ATEX 1119 X														
PTB 09 ATEX 1120 X														
PTB 11 ATEX 1034 X														
PTB 09 ATEX 1122 X														
PTB 09 ATEX 1123 X														

Selection chart

Type	Power	Speed	In 440 V	Efficiency	Power factor	Torque	Starting torque	Starting current	Max. torque	KR	Moment of inertia	Weight
	kW	min ⁻¹	A	%	cos φ	Nm	(MA/MN)	(IA/IN)	(MM/MN)		(kgm ²)	kg
4KTC 71 A-2	0.45	3300	1.16	74	0.88	1.3	2.4	3.7	2.7	16	0.00034	15
4KTC 71 B-2	0.66	3350	1.38	76	0.84	1.88	2.4	4.8	2.6	16	0.00042	16
4KTC 80 A-2	0.9	3380	1.55	86	0.88	2.55	2.4	5.6	2.5	16	0.00063	24
4KTC 80 B-2	1.3	3385	2.37	80.7	0.89	3.67	2.6	5.1	2.5	16	0.00079	26
4KTC 90 S-2	1.8	3435	3.45	76	0.85	5.0	2.1	5.7	2.4	16	0.00124	32
4KTC 90 L-2	2.6	3435	4.65	84	0.87	7.2	2.9	5.2	2.3	16	0.00155	34
4KTC 100 L-2	3.6	3390	6.5	85	0.86	10.2	2.0	6.2	2.4	16	0.00251	42.5
4KTC 112 M-2	4.8	3455	8.6	85	0.89	13.3	2.1	6.5	2.5	16	0.00451	58
4KTC 132 SA-2	6.6	3460	11.8	87	0.90	18.2	2.2	5.8	2.3	16	0.00969	77
4KTC 132 SB-2	9.0	3510	15.1	87	0.90	24.5	2.7	6.9	2.9	16	0.01225	84
4KTC 160 MA-2	13.0	3525	22.2	86	0.89	35.2	3.0	6.7	2.9	16	0.02943	148
4KTC 160 MB-2	18.0	3490	32.5	79	0.92	49.2	2.9	6.3	2.5	16	0.03912	166
4KTC 160 L-2	21.0	3520	32.5	93	0.92	57.0	2.7	6.8	2.8	16	0.0459	178
4KTC 180 M-2	24.0	3520	41.4	84	0.91	65.0	2.3	6.3	2.6	16	0.06151	205
4KTC 200 LA-2	34.0	3550	59.0	86	0.85	91.5	1.9	6.4	2.3	16	0.10442	240
4KTC 200 LB-2	42.0	3550	70.0	87	0.90	113.0	2.7	8.0	2.7	16	0.12739	250
4KTC 225 M-2	52.0	3520	88.0	86	0.90	141.0	2.0	6.5	2.7	16	0.22155	375
5KTC 250 M-2	64.0	3560	104.5	93	0.89	172.0	1.8	6.1	2.1	16	0.675	485
4KTC 280 S-2	82.0	3570	133.0	90	0.90	219.0	2.5	7.7	2.1	16	0.96	650
4KTC 280 M-2	100.0	3570	162.0	90	0.90	270.0	2.4	7.3	2.0	16	1.1	700
4KTC 315 S-2	120.0	3570	183.0	92	0.94	321.0	2.1	6.7	2.6	13	1.55	820
4KTC 315 MA-2	132.0	3580	219.0	89	0.89	357.0	1.5	5.6	1.6	13	1.8	930
4KTC 315 MB-2	160.0	3570	251.0	89	0.94	428.0	2.4	8.0	2.6	13	2.25	1240
4KTC 315 L-2	200.0	3575	320.0	91	0.90	535.0	2.1	7.4	2.3	13	2.8	1380



Three-phase motor with short-circuit rotor

Pole number 4

440 to 480 V 60 Hz

Protection class IP 55
Temperature class T1 to T4
Thermal class F

Explosion protection  II 2G Ex d IIC T4,  II 2G Ex de IIC T4,  II 2D Ex tD A21 IP 65 T135 °C													
Type	4KTC or 4KTCd											5KTC	4KTC
Frame size	63	71	80	90	100	112	132	160	180	200	225	250	280 315
PTB 07 ATEX 1036 X	●												
PTB 10 ATEX 1006 X		●						●					
PTB 10 ATEX 1028 X			●	●	●	●	●						
PTB 09 ATEX 1121 X									●				
PTB 09 ATEX 1119 X										●			
PTB 09 ATEX 1120 X											●		
PTB 11 ATEX 1034 X												●	
PTB 09 ATEX 1122 X													●
PTB 09 ATEX 1123 X													●

Selection chart

Type	Power kW	Speed min ⁻¹	In 440 V A	Efficiency %	Power factor cos φ	Torque Nm	Starting torque (MA/MN)	Starting current (IA/IN)	Max. torque (MM/MN)	KR	Moment of inertia (kgm ²)	Weight kg
4KTC 71 A-4	0.30	1640	0.80	60	0.78	1.75	1.8	3.0	1.9	16	0.00051	15
4KTC 71 B-4	0.45	1650	1.01	71	0.82	2.60	2.1	4.1	2.0	16	0.00063	16
4KTC 80 A-4	0.66	1640	1.52	75	0.83	3.84	1.9	4.1	2.0	16	0.00098	24
4KTC 80 B-4	0.90	1670	1.87	75	0.82	5.10	2.2	4.2	2.3	16	0.00125	26
4KTC 90 S-4	1.3	1675	2.47	82	0.85	7.40	1.9	5.2	2.1	16	0.00204	32
4KTC 90 L-4	1.8	1680	3.40	82	0.85	10.2	2.3	5.8	2.3	16	0.0026	35
4KTC 100 LA-4	2.6	1675	5.1	74	0.85	14.8	1.7	4.2	1.7	16	0.00388	42.5
4KTC 100 LB-4	3.6	1680	6.8	80	0.86	20.5	1.8	4.7	2.2	16	0.00499	46
4KTC 112 M-4	4.8	1730	8.6	87	0.85	26.5	2.3	6.1	2.8	16	0.01014	60
4KTC 132 S-4	6.6	1700	12.3	87	0.87	37.0	1.9	4.8	1.9	16	0.02113	84
4KTC 132 M-4	9.0	1730	15.6	88	0.86	49.6	2.3	4.6	2.3	16	0.02793	93.5
4KTC 160 M-4	13.0	1730	23.4	88	0.86	71.8	2.3	5.0	2.4	16	0.05417	159
4KTC 160 L-4	17.5	1755	29.3	88	0.86	94.2	2.3	6.3	2.5	16	0.07116	178
4KTC 180 M-4	21.0	1740	36.3	88	0.87	115.0	2.8	5.8	2.2	16	0.1129	215
4KTC 180 L-4	26.0	1770	42.7	91	0.85	140.0	2.7	6.5	2.2	16	0.1339	236
4KTC 200 L-4	34.0	1760	54.0	92	0.92	185.0	2.4	6.0	2.5	16	0.21298	250
4KTC 225 S-4	44.0	1770	71.8	91	0.88	237.0	2.1	5.8	1.9	16	0.36225	310
4KTC 225 M-4	52.0	1775	84.4	93	0.87	280.0	2.4	5.9	2.2	16	0.42845	390
5KTC 250 M-4	64.0	1770	104.0	90	0.9	345.0	3.0	7.6	2.2	16	0.875	480
4KTC 280 S-4	87.0	1780	144.0	91	0.86	467.0	2.3	5.5	1.8	16	1.875	610
4KTC 280 M-4	90.0	1790	148.0	93	0.85	481.0	2.5	8.6	2.3	16	2.25	685
4KTC 315 S-4	110.0	1790	186.0	89	0.87	588.0	2.4	6.7	2.1	16	3.9	820
4KTC 315 MA-4	132.0	1790	214.0	92	0.89	714.0	2.7	6.4	2.3	16	3.875	930
4KTC 315 MB-4	170.0	1795	288.0	92	0.85	905.0	1.5	5.5	1.6	16	5.0	1240
4KTC 315 L-4	200.0	1785	324.0	93	0.87	1071.0	1.6	6.8	1.8	16	6.1	1380



Three-phase motor with short-circuit rotor

Pole number 6

440 to 480 V 60 Hz

Protection class

IP 55

Temperature class

T1 to T4

Thermal class

F

Explosion protection II 2G Ex d IIC T4, II 2G Ex de IIC T4, II 2D Ex tD A21 IP 65 T135 °C													
Type	4KTC or 4KTCD											5KTC	4KTC
Frame size	63	71	80	90	100	112	132	160	180	200	225	250	280 315
PTB 07 ATEX 1036 X	●												
PTB 10 ATEX 1006 X		●						●					
PTB 10 ATEX 1028 X			●	●	●	●	●						
PTB 09 ATEX 1121 X									●				
PTB 09 ATEX 1119 X										●			
PTB 09 ATEX 1120 X											●		
PTB 11 ATEX 1034 X												●	
PTB 09 ATEX 1122 X													●
PTB 09 ATEX 1123 X													●

Selection chart

Type	Power kW	Speed min ⁻¹	In 440 V A	Efficiency %	Power factor cos φ	Torque Nm	Starting torque (MA/MN)	Starting current (IA/IN)	Max. torque (MM/MN)	KR	Moment of inertia (kgm ²)	Weight kg
4KTC 71 A-6	0.18	1115	0.67	60	0.65	1.55	2.1	3.1	2.3	16	0.00081	15
4KTC 71 B-6	0.25	1100	0.76	62	0.7	2.18	2.4	2.9	2.5	16	0.00101	16
4KTC 80 A-6	0.37	1100	1.06	62	0.74	3.23	2.1	3.5	2.5	16	0.00191	25
4KTC 80 B-6	0.55	1100	1.36	71	0.74	4.8	2.4	4.2	2.4	16	0.00239	26.5
4KTC 90 S-6	0.75	1090	1.94	69	0.72	6.6	1.8	3.6	2.0	16	0.0323	32
4KTC 90 L-6	1.1	1105	2.73	76	0.71	9.5	1.8	3.9	2.1	16	0.00419	35
4KTC 100 L-6	1.5	1110	3.35	76	0.76	12.8	2.2	4.8	2.2	16	0.00657	46
4KTC 112 M-6	2.2	1180	4.5	84	0.71	18	2.6	6.3	2.7	16	0.0158	60
4KTC 132 S-6	3.0	1170	6.0	82	0.79	24	2.3	6.4	2.5	16	0.02722	84
4KTC 132 MA-6	4.0	1150	8.1	80	0.8	33	2.4	6.2	2.9	16	0.03229	88
4KTC 132 MB-6	5.5	1150	10.8	81	0.82	45	2.3	6.2	3.0	16	0.03838	95
4KTC 160 M-6	7.5	1170	14.4	84	0.81	61	2.8	6.7	2.4	16	0.08121	161
4KTC 160 L-6	11.0	1165	20.0	86	0.83	90	2.3	7.2	3.6	16	0.10916	182
4KTC 180 L-6	15.0	1175	27.6	89	0.8	121	2.5	7.6	3.7	16	0.227	236
4KTC 200 LA-6	18.5	1175	32.6	89	0.83	150	1.4	5.6	2.3	13	0.24369	240
4KTC 200 LB-6	22.0	1180	39.3	91	0.81	178	2.2	8.0	3.3	16	0.27888	250
4KTC 225 M-6	30.0	1180	53.5	91	0.81	244	2.4	6.5	1.9	16	0.66117	390
5KTC 250 M-6	37.0	1185	69.0	92	0.75	298	1.9	4.1	1.7	13	1.125	480
4KTC 280 S-6	52.0	1185	94.0	91	0.8	418	1.9	4.4	1.9	16	2.3	610
4KTC 280 M-6	66.0	1170	119.0	90	0.82	540	1.7	3.7	1.6	16	2.625	685
4KTC 315 S-6	75.0	1180	140.0	95	0.82	610	2.5	5.9	2.8	16	4.625	820
4KTC 315 MA-6	90.0	1180	163.0	95	0.84	728	2.1	5.1	2.9	16	5.25	930
4KTC 315 MB-6	110.0	1190	175.0	94	0.88	884	2.1	6.1	2.2	16	6.0	1240
4KTC 315 L-6	132.0	1190	210.0	94	0.88	1160	2.0	6.3	2.1	16	7.3	1380



Three-phase motor with short-circuit rotor

Pole number 8

440 to 480 V 60 Hz

Protection class

IP 55

Temperature class

T1 to T4

Thermal class

F

Explosion protection  II 2G Ex d IIC T4,  II 2G Ex de IIC T4,  II 2D Ex tD A21 IP 65 T135 °C														
Type	4KTC or 4KTCd											5KTC	4KTC	
Frame size	63	71	80	90	100	112	132	160	180	200	225	250	280	315
PTB 07 ATEX 1036 X														
PTB 10 ATEX 1006 X														
PTB 10 ATEX 1028 X														
PTB 09 ATEX 1121 X														
PTB 09 ATEX 1119 X														
PTB 09 ATEX 1120 X														
PTB 11 ATEX 1034 X														
PTB 09 ATEX 1122 X														
PTB 09 ATEX 1123 X														

Selection chart

Type	Power kW	Speed min ⁻¹	In 440 V A	Efficiency %	Power factor cos φ	Torque Nm	Starting torque (MA/MN)	Starting current (IA/IN)	Max. torque (MM/MN)	KR	Moment of inertia (kgm ²)	Weight kg
4KTC 71 A-8	0.09	820	0.42	45	0.62	1	2.2	2.5	2.1	16	0.00081	15
4KTC 71 B-8	0.12	780	0.49	45	0.71	1.47	1.8	2.4	2.0	16	0.00101	16
4KTC 80 A-8	0.18	825	0.62	58	0.63	2.1	2.1	2.9	2.1	16	0.00191	25
4KTC 80 B-8	0.25	825	0.84	58	0.67	2.9	2.0	3.1	2.3	16	0.00239	26.5
4KTC 90 S-8	0.37	820	1.17	64	0.62	4.3	1.6	2.9	1.9	16	0.00323	32
4KTC 90 L-8	0.55	825	1.6	72	0.61	6.4	1.7	3.2	2.0	16	0.00419	35
4KTC 100 LA-8	0.75	825	2.14	67	0.66	8.7	1.6	3.5	1.9	16	0.00657	42.5
4KTC 100 LB-8	1.1	845	3.1	71	0.62	12.4	2.0	4.0	2.3	16	0.00857	46
4KTC 112 M-8	1.5	855	3.8	77	0.67	16.8	2.0	4.3	2.5	16	0.0158	60
4KTC 132 S-8	2.2	845	5.0	75	0.76	24.6	1.8	4.3	2.2	16	0.02606	79
4KTC 132 M-8	3.0	850	6.6	79	0.73	33	2.2	4.9	2.3	16	0.03446	85
4KTC 160 MA-8	4.0	865	8.5	81	0.76	44	1.9	5.3	2.3	16	0.0688	146
4KTC 160 MB-8	5.5	865	10.9	84	0.78	60	1.9	5.0	2.1	16	0.08939	160
4KTC 160 L-8	7.5	875	15.3	85	0.76	82	2.3	6.2	2.1	16	0.12027	182
4KTC 180 L-8	11.0	870	20.7	88	0.8	121	2.0	5.8	2.5	16	0.227	236
4KTC 200 L-8	15.0	880	27.7	91	0.78	163	2.4	7.4	3.7	16	0.37827	250
4KTC 225 S-8	18.5	885	35.0	91	0.76	200	2.4	7.6	3.2	16	0.57008	310
4KTC 225 M-8	22.0	885	42.0	90	0.77	239	2.2	6.9	3.1	16	0.67806	390
5KTC 250 M-8	30.0	875	59.0	92	0.79	332	1.7	5.4	2.4	16	1.175	480
4KTC 280 S-8	37.0	875	74.0	93	0.78	404	1.9	6.0	2.3	16	2.3	610
4KTC 280 M-8	45.0	880	90.0	93	0.78	488	1.9	6.4	2.7	16	2.625	689
4KTC 315 S-8	55.0	880	104.0	94	0.81	597	2.2	6.2	2.3	16	4.625	820
4KTC 315 MA-8	75.0	890	140.0	94	0.82	969	1.8	6.3	2.1	16	5.25	930
4KTC 315 MB-8	90.0	885	153.0	93	0.83	973	1.9	6.4	2.0	16	6.0	1240
4KTC 315 L-8	110.0	885	189.0	93	0.82	1189	1.8	6.3	1.9	16	7.3	1380



Technical data and tables with ratings for pole changing motors - constant torque

Three-phase motor with short-circuit rotor

Pole number 4/2

D/YY 380 to 415 V 50 Hz

Protection class

IP 55

Temperature class

T1 to T4

Thermal class

F

Explosion protection 														
Type	4KTC or 4KTCD											5KTC	4KTC	
Frame size	63	71	80	90	100	112	132	160	180	200	225	250	280	315
PTB 07 ATEX 1036 X	●													
PTB 10 ATEX 1006 X		●						●						
PTB 10 ATEX 1028 X			●	●	●	●	●							
PTB 09 ATEX 1121 X									●					
PTB 09 ATEX 1119 X										●				
PTB 09 ATEX 1120 X											●			
PTB 11 ATEX 1034 X												●		
PTB 09 ATEX 1122 X													●	
PTB 09 ATEX 1123 X														●

Selection chart

Type	Power	Speed	In 400 V	Starting current	Max. torque	Weight
	kW	min ⁻¹	A	(I _A /I _N)	(MM/MN)	kg
4KTC 71 A-4/2	0.21 0.28	1380 2800	0.75 0.9	3.6 3.9	2.1 2.1	16
4KTC 71 B-4/2	0.3 0.43	1380 2800	1.05 1.25	3.8 4.0	2.1 2.0	17
4KTC 80 A-4/2	0.5 0.65	1370 2760	1.26 1.43	3.7 3.4	1.8 1.9	25
4KTC 80 B-4/2	0.7 0.85	1365 2810	1.75 1.85	4.1 5.5	2.0 2.4	28
4KTC 90 S-4/2	1.1 1.4	1415 2800	2.6 2.95	4.4 4.7	1.9 2.0	34
4KTC 90 L-4/2	1.5 1.9	1410 2850	3.3 3.9	4.9 5.3	2.1 2.3	36
4KTC 100 LA-4/2	1.8 2.4	1430 2860	4.16 5.25	4.8 5.0	2.0 1.9	45
4KTC 100 LB-4/2	2.6 3.2	1420 2870	5.65 6.6	5.85 6.6	2.1 2.3	49
4KTC 112 M-4/2	3.7 4.4	1460 2890	8.4 8.5	6.6 7.4	2.8 2.9	64
4KTC 132 S-4/2	5.0 6.0	1460 2900	11.5 11.9	6.2 6.4	2.7 2.8	89
4KTC 132 M-4/2	6.1 7.5	1450 2910	13.8 15.4	6.7 6.9	2.5 2.3	99
4KTC 160 M-4/2	9.0 10.5	1465 2930	19.5 22.0	6.5 7.5	2.3 2.2	169

Selection chart

Type	Power	Speed	In 400 V	Starting current	Max. torque	Weight
	kW	min ⁻¹	A	(I _A /I _N)	(MM/MN)	kg
4KTC 160 L-4/2	12 15	1470 2940	27.5 31	7.2 7.5	2.8 2.7	189
4KTC 180 M-4/2	14 17	1470 2940	29 33	6.8 7.5	2.5 2.5	220
4KTC 180 L-4/2	17 20	1475 2950	35 39	6.9 7.5	2.5 2.5	240
4KTC 200 L-4/2	20 23	1475 2950	41 46	7.0 7.5	2.5 2.5	260
4KTC 225 S-4/2	24 28	1480 2955	46 59	7.0 7.5	2.5 2.5	320
4KTC 225 M-4/2	29 34	1485 2960	62 66	7.2 7.6	2.5 2.6	400
5KTC 250 M-4/2	36 45	1485 1960	77 87	7.1 7.5	2.4 2.5	490
4KTC 280 S-4/2	46 58	1480 2970	85 95	6.8 7.0	2.0 2.0	610
4KTC 280 M-4/2	65 80	1480 2970	128 142	6.6 6.8	1.8 1.8	685
4KTC 315 S-4/2	78 90	1485 2970	154 176	6.5 6.0	1.8 1.7	820
4KTC 315 MA-4/2	90 100	1485 2970	156 190	6.5 6.2	1.8 1.7	930
4KTC 315 MB-4/2	100 120	1485 2970	208 230	6.2 6.0	1.8 1.6	1240



Three-phase motor with short-circuit rotor

Pole number 8/4

D/YY 380 to 415 V 50 Hz

Protection class

IP 55

Temperature class

T1 to T4

Thermal class

F

Explosion protection II 2G Ex d IIC T4, II 2G Ex de IIC T4, II 2D Ex tD A21 IP 65 T135 °C													
Type	4KTC or 4KTCD											5KTC	4KTC
Frame size	63	71	80	90	100	112	132	160	180	200	225	250	280 315
PTB 07 ATEX 1036 X	●												
PTB 10 ATEX 1006 X		●						●					
PTB 10 ATEX 1028 X			●	●	●	●	●						
PTB 09 ATEX 1121 X									●				
PTB 09 ATEX 1119 X										●			
PTB 09 ATEX 1120 X											●		
PTB 11 ATEX 1034 X												●	
PTB 09 ATEX 1122 X													●
PTB 09 ATEX 1123 X													●

Selection chart

Type	Power	Speed	In 400 V	Starting current	Max. torque	Weight
	kW	min ⁻¹	A	(IA/IN)	(MM/MN)	kg
4KTC 71 A-8/4	0.048 0.22	620 1370	0.32 0.57	2.1 3.8	1.6 1.8	16
4KTC 71 B-8/4	0.07 0.32	620 1370	0.47 0.82	2.1 3.8	1.6 1.8	17
4KTC 80 A-8/4	0.2 0.3	690 1380	0.83 0.79	2.8 3.9	2.0 2.2	25
4KTC 80 B-8/4	0.27 0.4	690 1400	1.08 0.96	2.9 4.5	2.1 2.2	28
4KTC 90 S-8/4	0.42 0.8	705 1390	1.9 1.9	2.8 3.9	2.0 1.8	34
4KTC 90 L-8/4	0.5 1.0	710 1410	2.3 2.25	3.1 4.3	2.1 1.9	36
4KTC 100 LA-8/4	0.9 1.3	690 1380	3.05 3.0	3.2 4.2	2.1 2.1	45
4KTC 100 LB-8/4	1.0 1.6	720 1430	3.2 3.35	3.9 5.3	2.1 2.2	49
4KTC 112 M-8/4	1.5 2.5	710 1430	4.25 5.0	4.6 5.7	2.2 2.1	64
4KTC 132 S-8/4	2.3 3.6	720 1450	6.7 7.3	5.3 6.9	2.3 2.2	89
4KTC 132 M-8/4	3.0 5.0	720 1445	9.5 9.9	4.5 5.4	2.3 2.3	99
4KTC 160 MA-8/4	4.0 5.5	725 1460	10.5 10.8	5.2 7.0	1.8 1.8	155

Selection chart

Type	Power	Speed	In 400 V	Starting current	Max. torque	Weight
	kW	min ⁻¹	A	(IA/IN)	(MM/MN)	kg
4KTC 160 MB-8/4	4.6 7.3	725 1460	12.8 14.6	4.6 7.0	1.8 1.9	165
4KTC 160 L-8/4	6.8 11	725 1460	21 23	4.8 7.0	1.8 2.0	197
4KTC 180 L-8/4	11 15	725 1460	29 30	4.6 7.0	1.7 2.0	240
4KTC 200 L-8/4	15 20	730 1465	33 44	5.3 6.8	1.5 1.8	260
4KTC 225 S-8/4	18 24	730 1465	42 50	5.3 6.8	1.6 1.8	320
4KTC 225 M-8/4	22 28	730 1465	50 55	5.0 7.0	1.5 2.0	400
5KTC 250 M-8/4	30 42	730 1465	67 80	4.5 6.5	1.5 2.0	490
4KTC 280 S-8/4	35 51	735 1470	80 96	4.6 6.5	1.6 1.6	610
4KTC 280 M-8/4	42 60	735 1470	88 105	5.0 6.3	1.5 1.5	685
4KTC 315 S-8/4	52 68	740 1475	109 130	5.0 6.4	1.6 1.5	820
4KTC 315 M-8/4	70 90	740 1475	147 173	5.8 6.5	1.7 1.5	930



Three-phase motor with short-circuit rotor

Pole number 6/4

Y/Y 380 to 415 V 50 Hz

Protection class

IP 55

Temperature class

T1 to T4

Thermal class

F

Explosion protection II 2G Ex d IIC T4, II 2G Ex de IIC T4, II 2D Ex tD A21 IP 65 T135 °C													
Type	4KTC or 4KTCD											5KTC	4KTC
Frame size	63	71	80	90	100	112	132	160	180	200	225	250	280 315
PTB 07 ATEX 1036 X	●												
PTB 10 ATEX 1006 X		●						●					
PTB 10 ATEX 1028 X			●	●	●	●	●						
PTB 09 ATEX 1121 X									●				
PTB 09 ATEX 1119 X										●			
PTB 09 ATEX 1120 X											●		
PTB 11 ATEX 1034 X												●	
PTB 09 ATEX 1122 X													●
PTB 09 ATEX 1123 X													●

Selection chart

Type	Power	Speed	In 400 V	Starting current	Max. torque	Weight
	kW	min ⁻¹	A	(IA/IN)	(MM/MN)	kg
4KTC 71 A-6/4	0.15 0.2	920 1440	0.75 0.85	2.6 3.3	1.5 1.5	16
4KTC 71 B-6/4	0.21 0.3	920 1420	1.2 1.35	2.6 3.4	2.0 1.9	17
4KTC 80 A-6/4	0.22 0.32	930 1455	0.7 1.05	3.3 4.2	1.9 2.1	25
4KTC 80 B-6/4	0.26 0.4	940 1425	0.94 1.28	3.5 3.6	2.2 1.9	28
4KTC 90 S-6/4	0.45 0.66	945 1450	1.5 1.75	3.6 5.3	2.1 2.2	34
4KTC 90 L-6/4	0.6 0.9	960 1425	1.8 2.1	3.6 4.4	2.1 1.9	36
4KTC 100 LA-6/4	0.9 1.3	960 1420	2.4 3.0	4.0 4.5	1.8 1.9	45
4KTC 100 LB-6/4	1.1 1.7	960 1450	2.8 3.7	4.3 4.7	1.8 2.1	49
4KTC 112 M-6/4	1.5 2.4	970 1450	3.55 5.05	5.3 5.4	2.2 1.9	64
4KTC 132 S-6/4	2.2 3.0	965 1465	5.05 6.0	5.7 6.1	1.9 2.1	89
4KTC 132 M-6/4	3.0 4.5	975 1460	6.7 8.9	6.5 6.3	2.2 1.9	99
4KTC 160 M-6/4	3.8 5.7	965 1465	9.0 13.0	6.0 6.5	2.0 1.8	155

Selection chart

Type	Power	Speed	In 400 V	Starting current	Max. torque	Weight
	kW	min ⁻¹	A	(IA/IN)	(MM/MN)	kg
4KTC 160 L-6/4	5.5 8	980 1480	13.3 16.8	7.0 7.0	2.1 2.0	197
4KTC 180 M-6/4	7.5 11	980 1470	16.6 22	6.3 6.5	2.0 1.6	220
4KTC 180 L-6/4	9 13	980 1470	20 26	6.5 7.0	2.0 1.5	240
4KTC 200 L-6/4	13 19	980 1470	31 39	6.8 7.2	2.1 2.2	260
4KTC 225 S-6/4	19 23	980 1470	40 48	6.0 6.3	2.0 2.2	320
4KTC 225 M-6/4	23 27	980 1470	48 56	6.0 6.5	2.1 2.0	400
5KTC 250 M-6/4	27 32	980 1470	53 65	6.0 6.5	2.1 2.2	490
4KTC 280 S-6/4	32 45	985 1475	63 89	6.5 7.0	2.3 2.7	610
4KTC 280 M-6/4	37 55	985 1475	72 108	6.5 7.0	2.3 2.7	685
4KTC 315 S-6/4	45 67	985 1485	88 130	6.8 7.2	2.1 2.3	820
4KTC 315 M-6/4	55 80	985 1485	108 155	6.8 7.2	2.1 2.3	930

**Three-phase motor with short-circuit rotor****Pole number 8/6**

Y/Y 380 to 415 V 50 Hz

Protection class

IP 55

Temperature class

T1 to T4

Thermal class

F

Explosion protection II 2G Ex d IIC T4, II 2G Ex de IIC T4, II 2D Ex tD A21 IP 65 T135 °C													
Type	4KTC or 4KTCD											5KTC	4KTC
Frame size	63	71	80	90	100	112	132	160	180	200	225	250	280 315
PTB 07 ATEX 1036 X	●												
PTB 10 ATEX 1006 X		●						●					
PTB 10 ATEX 1028 X			●	●	●	●	●						
PTB 09 ATEX 1121 X									●				
PTB 09 ATEX 1119 X										●			
PTB 09 ATEX 1120 X											●		
PTB 11 ATEX 1034 X												●	
PTB 09 ATEX 1122 X													●
PTB 09 ATEX 1123 X													●

Selection chart

Type	Power kW	Speed min ⁻¹	In 400 V A	Starting current (I _A /I _N)	Max. torque (MM/MN)	Weight kg
4KTC 90 S-8/6	0.35 0.45	695 960	1.35 1.5	2.7 3.3	1.7 1.8	34
4KTC 90 L-8/6	0.45 0.6	695 960	1.68 2.07	2.7 3.5	1.8 2.0	36
4KTC 100 LA-8/6	0.6 0.8	715 970	2.05 2.15	2.9 4.1	1.6 1.8	45
4KTC 100 LB-8/6	0.75 0.9	710 970	2.4 2.5	3.1 4.7	1.6 2.0	49
4KTC 112 M-8/6	0.9 1.2	720 970	2.8 3.0	4.2 5.1	2.2 2.4	64
4KTC 132 S-8/6	1.5 2.0	725 975	5.05 5.5	4.8 6.2	2.5 2.4	89
4KTC 132 M-8/6	2.2 3.0	725 975	6.8 8.1	3.9 5.3	2.1 2.2	99
4KTC 160 M-8/6	3.5 5.0	725 975	8.8 12.0	5.5 6.4	2.3 2.1	155
4KTC 160 L-8/6	5.0 7.0	725 975	12.0 16.0	5.5 6.5	2.4 2.2	197

Selection chart

Type	Power kW	Speed min ⁻¹	In 400 V A	Starting current (I _A /I _N)	Max. torque (MM/MN)	Weight kg
4KTC 180 L-8/6	7.0 9.5	725 980	18 24	5.5 6.2	2.0 1.8	240
4KTC 200 L-8/6	10 13	725 980	23 27	5.5 6.8	2.3 2.1	260
4KTC 225 S-8/6	13 16	725 975	29 36	5.3 6.2	1.7 1.4	320
4KTC 225 M-8/6	17 22	725 975	42 54	5.4 6.5	1.7 1.4	400
5KTC 250 M-8/6	22 30	730 985	51 65	5.8 6.5	1.9 1.6	490
4KTC 280 S-8/6	27 35	735 985	63 80	5.8 6.5	1.8 1.5	610
4KTC 280 M-8/6	33 41	735 985	74 90	6.0 6.7	1.8 1.5	685
4KTC 315 S-8/6	40 50	735 985	90 102	6.0 7.0	1.8 1.4	820
4KTC 315 M-8/6	48 62	735 985	103 125	6.0 7.0	1.8 1.4	930



Three-phase motor with short-circuit rotor

Pole number 4/2

D/YY 440 to 480 V 60 Hz

Protection class IP 55
 Temperature class T1 to T4
 Thermal class F

Explosion protection II 2G Ex d IIC T4, II 2G Ex de IIC T4, II 2D Ex td A21 IP 65 T135 °C													
Type	4KTC or 4KTCD											5KTC	4KTC
Frame size	63	71	80	90	100	112	132	160	180	200	225	250	280 315
PTB 07 ATEX 1036 X	●												
PTB 10 ATEX 1006 X		●						●					
PTB 10 ATEX 1028 X			●	●	●	●	●						
PTB 09 ATEX 1121 X									●				
PTB 09 ATEX 1119 X										●			
PTB 09 ATEX 1120 X											●		
PTB 11 ATEX 1034 X												●	
PTB 09 ATEX 1122 X													●
PTB 09 ATEX 1123 X													●

Selection chart

Type	Power kW	Speed min ⁻¹	In 440 V A	Starting current (I _A /I _N)	Max. torque (MM/MN)	Weight kg
4KTC 71 A-4/2	0.23 0.3	1660 3360	0.75 0.9	3.4 3.7	1.8 1.8	16
4KTC 71 B-4/2	0.33 0.45	1600 3360	1.05 1.25	3.6 3.8	1.8 1.7	17
4KTC 80 A-4/2	0.55 0.7	1640 3310	1.26 1.43	3.5 3.2	1.5 1.6	25
4KTC 80 B-4/2	0.75 0.9	1640 3380	1.75 1.85	3.9 5.2	1.6 1.9	28
4KTC 90 S-4/2	1.2 1.5	1700 3360	2.6 3.0	4.2 4.4	1.4 1.5	34
4KTC 90 L-4/2	1.6 2	1690 3420	3.3 3.9	4.6 5	1.6 1.8	36
4KTC 100 LA-4/2	2.0 2.6	1710 3410	4.1 5.2	4.5 3.9	1.5 1.5	45
4KTC 100 LB-4/2	2.8 3.5	1700 3440	5.65 6.6	4.8 5.5	1.6 1.7	49
4KTC 112 M-4/2	4.0 4.8	1750 3470	8.4 8.5	6.3 7.0	2.0 2.0	64
4KTC 132 S-4/2	5.5 6.5	1750 3480	11.5 11.9	5.9 6.0	2.3 2.4	89
4KTC 132 M-4/2	6.5 8.0	1750 3490	13.5 14.5	5.5 6.0	1.9 1.9	99
4KTC 160 M-4/2	10.0 11.0	1760 3520	19.5 22.0	6.2 7.1	2.0 2.2	1.9

Selection chart

Type	Power kW	Speed min ⁻¹	In 440 V A	Starting current (I _A /I _N)	Max. torque (MM/MN)	Weight kg
4KTC 160 L-4/2	13 16	1760 3540	27.5 32.0	8.5 7.6	3.0 2.6	189
4KTC 180 M-4/2	15 18	1760 3530	29.0 33.0	6.5 7.1	2.1 2.1	220
4KTC 180 L-4/2	18 22	1770 3540	35.0 39.0	6.5 7.1	2.1 2.1	240
4KTC 200 L-4/2	22 25	1780 3550	37.0 43.0	8.0 8.0	2.6 2.1	260
4KTC 225 S-4/2	26 30	1780 3550	46.0 59.0	6.6 7.1	2.1 2.1	320
4KTC 225 M-4/2	31 37	1780 3550	62.0 66.0	6.8 7.2	2.1 2.2	400
5KTC 250 M-4/2	40 50	1780 3550	77.0 87.0	6.7 7.1	2.0 2.1	490
4KTC 280 S-4/2	50 63	1780 3560	85.0 95.0	6.5 6.6	1.7 1.7	610
4KTC 280 M-4/2	71 88	1780 3560	128.0 142.0	6.3 6.5	1.5 1.5	685
4KTC 315 S-4/2	85 98	1780 3560	154.0 176.0	6.2 5.7	1.5 1.5	820
4KTC 315 MA-4/2	98 110	1780 3560	156.0 190.0	6.2 5.9	1.5 1.5	930
4KTC 315 MB-4/2	110 130	1780 3560	208.0 230.0	5.9 5.7	1.5 1.4	1240



Three-phase motor with short-circuit rotor

Pole number 8/4

D/YY 440 to 480 V 60 Hz

Protection class

IP 55

Temperature class

T1 to T4

Thermal class

F

Explosion protection II 2G Ex d IIC T4, II 2G Ex de IIC T4, II 2D Ex tD A21 IP 65 T135 °C													
Type	4KTC or 4KTCD											5KTC	4KTC
Frame size	63	71	80	90	100	112	132	160	180	200	225	250	280 315
PTB 07 ATEX 1036 X	●												
PTB 10 ATEX 1006 X		●						●					
PTB 10 ATEX 1028 X			●	●	●	●	●						
PTB 09 ATEX 1121 X									●				
PTB 09 ATEX 1119 X										●			
PTB 09 ATEX 1120 X											●		
PTB 11 ATEX 1034 X												●	
PTB 09 ATEX 1122 X													●
PTB 09 ATEX 1123 X													●

Selection chart

Type	Power kW	Speed min ⁻¹	In 440 V A	Starting current (IA/IN)	Max. torque (MM/MN)	Weight kg
4KTC 71 A-8/4	0.05 0.24	740 1640	0.32 0.57	2.0 3.6	1.4 1.5	16
4KTC 71 B-8/4	0.08 0.35	740 1640	0.47 0.82	2.0 3.6	1.4 1.5	17
4KTC 80 A-8/4	0.22 0.33	830 1660	0.83 0.79	2.7 3.7	1.5 1.7	25
4KTC 80 B-8/4	0.30 0.44	830 1680	1.08 0.96	2.7 4.3	1.7 1.7	28
4KTC 90 S-8/4	0.46 0.85	850 1670	1.9 1.9	2.7 3.7	1.6 1.3	34
4KTC 90 L-8/4	0.55 1.10	850 1690	2.3 2.25	2.9 4.1	1.7 1.3	36
4KTC 100 LA-8/4	1.0 1.4	840 1690	3.0 3.0	3.1 4.7	1.5 1.5	45
4KTC 100 LB-8/4	1.1 1.7	860 1720	3.2 3.35	3.7 5.0	1.7 1.5	49
4KTC 112 M-8/4	1.6 2.7	860 1730	4.55 5.0	4.5 5.7	1.7 1.6	64
4KTC 132 S-8/4	2.5 4.0	870 1740	7.1 7.3	4.5 6.3	1.8 1.8	89
4KTC 132 M-8/4	3.3 5.5	880 1750	9.3 8.9	4.9 7.3	2.3 2.0	99
4KTC 160 MA-8/4	4.4 6.0	870 1740	10.0 11.0	5.0 6.7	1.6 1.7	155

Selection chart

Type	Power kW	Speed min ⁻¹	In 440 V A	Starting current (IA/IN)	Max. torque (MM/MN)	Weight kg
4KTC 160 MB-8/4	5.0 8.0	870 1740	11.7 14.3	5.5 6.6	1.8 1.7	165
4KTC 160 L-8/4	7.5 12.0	870 1750	16.5 20.2	5.7 6.8	1.8 1.5	220
4KTC 180 L-8/4	12.0 16.0	870 1750	29.0 30.0	4.4 6.6	1.5 1.7	240
4KTC 200 L-8/4	16.0 22.0	890 1780	33.8 42.4	7.3 8.9	2.1 2.2	260
4KTC 225 S-8/4	20.0 26.0	880 1760	42.0 50.0	5.0 6.5	1.4 1.5	320
4KTC 225 M-8/4	24.0 30.0	880 1760	50.0 55.0	4.7 6.6	1.3 1.7	400
5KTC 250 M-8/4	33.0 46.0	880 1760	67.0 80.0	4.3 6.2	1.3 1.7	490
4KTC 280 S-8/4	38.0 56.0	880 1760	80.0 96.0	4.4 6.2	1.4 1.4	610
4KTC 280 M-8/4	46.0 66.0	880 1760	88.0 105.0	4.7 6.0	1.3 1.3	685
4KTC 315 S-8/4	57.0 75.0	890 1770	109.0 130.0	4.7 6.1	1.4 1.3	820
4KTC 315 M-8/4	77.0 100.0	890 1770	147.0 173.0	5.5 6.2	1.5 1.3	930



Three-phase motor with short-circuit rotor

Pole number 6/4

Y/Y 440 to 480 V 60 Hz

Protection class

IP 55

Temperature class

T1 to T4

Thermal class

F

Explosion protection II 2G Ex d IIC T4, II 2G Ex de IIC T4, II 2D Ex tD A21 IP 65 T135 °C													
Type	4KTC or 4KTCD											5KTC	4KTC
Frame size	63	71	80	90	100	112	132	160	180	200	225	250	280 315
PTB 07 ATEX 1036 X	●												
PTB 10 ATEX 1006 X		●						●					
PTB 10 ATEX 1028 X			●	●	●	●	●						
PTB 09 ATEX 1121 X									●				
PTB 09 ATEX 1119 X										●			
PTB 09 ATEX 1120 X											●		
PTB 11 ATEX 1034 X												●	
PTB 09 ATEX 1122 X													●
PTB 09 ATEX 1123 X													●

Selection chart

Type	Power kW	Speed min ⁻¹	In 440 V A	Starting current (IA/IN)	Max. torque (MM/MN)	Weight kg
4KTC 71 A-6/4	0.16 0.22	1100 1730	0.75 0.85	2.5 3.1	1.4 1.3	16
4KTC 71 B-6/4	0.23 0.33	1100 1700	1.05 1.05	3.6 3.0	1.6 1.4	17
4KTC 80 A-6/4	0.24 0.35	1120 1750	0.7 1.07	3.1 4.0	1.5 1.6	25
4KTC 80 B-6/4	0.28 0.44	1140 1730	0.95 1.2	3.8 3.9	2.1 1.5	28
4KTC 90 S-6/4	0.5 0.7	1130 1740	1.5 1.75	3.4 5.0	1.8 1.9	34
4KTC 90 L-6/4	0.65 1.0	1150 1700	1.8 2.1	3.4 4.2	1.5 1.4	36
4KTC 100 LA-6/4	1.0 1.4	1150 1700	2.4 3.0	3.8 4.3	1.3 1.4	45
4KTC 100 LB-6/4	1.2 1.8	1150 1730	2.8 3.75	4.1 4.6	1.3 1.5	49
4KTC 112 M-6/4	1.6 2.6	1160 1740	3.55 5.05	5.0 5.2	1.6 1.5	64
4KTC 132 S-6/4	2.4 3.3	1160 1760	5.05 6.0	5.4 5.8	1.5 1.7	89
4KTC 132 M-6/4	3.3 5.0	1170 1750	6.7 8.9	6.2 6.0	1.7 1.5	99
4KTC 160 M-6/4	4.0 6.2	1180 1760	8.75 11.8	6.3 7.6	1.7 1.7	155

Selection chart

Type	Power kW	Speed min ⁻¹	In 440 V A	Starting current (IA/IN)	Max. torque (MM/MN)	Weight kg
4KTC 160 L-6/4	6.0 8.8	1180 1770	12.3 15.5	6.7 8.5	1.7 2.0	197
4KTC 180 M-6/4	8.2 12.0	1180 1760	16.6 22.0	6.0 6.2	1.7 1.4	220
4KTC 180 L-6/4	10.0 14.0	1180 1760	20.0 26.0	6.2 6.6	1.7 1.3	240
4KTC 200 L-6/4	14.0 20.0	1180 1760	31.0 39.0	6.5 6.8	1.8 1.9	260
4KTC 225 S-6/4	20.0 25.0	1180 1760	40.0 48.0	5.7 6.0	1.7 1.9	320
4KTC 225 M-6/4	25.0 29.0	1180 1760	48.0 56.0	5.7 6.2	1.8 1.7	400
5KTC 250 M-6/4	29.0 35.0	1180 1760	53.0 65.0	5.7 6.2	1.8 1.9	490
4KTC 280 S-6/4	35.0 50.0	1180 1770	63.0 89.0	6.2 6.6	2.0 2.3	610
4KTC 280 M-6/4	40.0 60.0	1180 1770	72.0 108.0	6.2 6.6	2.0 2.3	685
4KTC 315 S-6/4	50.0 73.0	1180 1780	88.0 130.0	6.5 6.8	1.8 2.0	820
4KTC 315 M-6/4	60.0 88.0	1180 1780	108.0 155.0	6.5 6.8	1.8 2.0	930



Three-phase motor with short-circuit rotor

Pole number 8/6

Y/Y 440 to 480 V 60 Hz

Protection class

IP 55

Temperature class

T1 to T4

Thermal class

F

Explosion protection															II 2G Ex d IIC T4, II 2G Ex de IIC T4, II 2D Ex tD A21 IP 65 T135 °C														
Type	4KTC or 4KTCD															5KTC	4KTC												
Frame size	63	71	80	90	100	112	132	160	180	200	225	250	280	315															
PTB 07 ATEX 1036 X	●																												
PTB 10 ATEX 1006 X		●						●																					
PTB 10 ATEX 1028 X			●	●	●	●	●																						
PTB 09 ATEX 1121 X									●																				
PTB 09 ATEX 1119 X										●																			
PTB 09 ATEX 1120 X											●																		
PTB 11 ATEX 1034 X												●																	
PTB 09 ATEX 1122 X													●																
PTB 09 ATEX 1123 X														●															

Selection chart

Type	Power kW	Speed min ⁻¹	In 440 V A	Starting current (I _A /I _N)	Max. torque (MM/MN)	Weight kg
4KTC 90 S-8/6	0.38 0.50	830 1150	1.35 1.5	2.6 3.1	1.5 1.5	34
4KTC 90 L-8/6	0.50 0.65	830 1150	1.68 2.07	2.6 3.3	1.3 1.5	36
4KTC 100 LA-8/6	0.65 0.85	860 1160	2.05 2.15	2.8 3.9	1.4 1.5	45
4KTC 100 LB-8/6	0.8 1.0	850 1160	2.4 2.5	2.9 3.9	1.4 1.5	49
4KTC 112 M-8/6	1.0 1.3	860 1160	2.8 3.0	4.0 4.8	1.6 1.9	64
4KTC 132 S-8/6	1.6 2.2	870 1170	5.05 5.5	4.6 5.9	2.1 2.0	89
4KTC 132 M-8/6	2.4 3.3	870 1170	6.8 8.1	3.7 5.0	1.8 1.9	99
4KTC 160 M-8/6	3.8 5.5	870 1170	8.8 12.0	5.2 6.1	2.0 1.8	155
4KTC 160 L-8/6	5.5 7.5	870 1170	12.0 16.0	5.2 6.1	2.0 1.9	197

Selection chart

Type	Power kW	Speed min ⁻¹	In 440 V A	Starting current (I _A /I _N)	Max. torque (MM/MN)	Weight kg
4KTC 180 L-8/6	7.5 10.5	870 1180	18.0 24.0	5.2 5.9	1.7 1.5	240
4KTC 200 L-8/6	11.0 14.0	870 1180	23.0 27.0	5.2 6.5	2.0 1.8	260
4KTC 225 S-8/6	14.0 17.0	870 1170	29.0 36.0	5.0 5.9	1.5 1.2	320
4KTC 225 M-8/6	18.0 24.0	870 1170	42.0 54.0	5.1 6.2	1.5 1.2	400
5KTC 250 M-8/6	24.0 33.0	880 1180	51.0 65.0	5.5 6.2	1.6 1.4	490
4KTC 280 S-8/6	30.0 38.0	880 1180	63.0 80.0	5.5 6.2	1.5 1.3	610
4KTC 280 M-8/6	36.0 45.0	880 1180	74.0 90.0	5.7 6.4	1.5 1.3	685
4KTC 315 S-8/6	44.0 55.0	880 1180	90.0 102.0	5.7 6.6	1.5 1.2	820
4KTC 315 M-8/6	53.0 68.0	880 1180	103.0 125.0	5.7 6.6	1.5 1.2	930



Technical data and tables with ratings for pole changing motors - ventilator drive

Three-phase motor with short-circuit rotor

Pole number 4/2

Y/YY 380 to 415 V 50 Hz

 Protection class
 Temperature class
 Thermal class

 IP 55
 T1 to T4
 F

Explosion protection  II 2G Ex d IIC T4,  II 2G Ex de IIC T4,  II 2D Ex tD A21 IP 65 T135 °C														
Type	4KTC or 4KTCD												5KTC	4KTC
Frame size	63	71	80	90	100	112	132	160	180	200	225	250	280	315
PTB 07 ATEX 1036 X														
PTB 10 ATEX 1006 X														
PTB 10 ATEX 1028 X														
PTB 09 ATEX 1121 X														
PTB 09 ATEX 1119 X														
PTB 09 ATEX 1120 X														
PTB 11 ATEX 1034 X														
PTB 09 ATEX 1122 X														
PTB 09 ATEX 1123 X														

Selection chart

Type	Power	Speed	In 400 V	Starting current	Max. torque	Weight
	kW	min ⁻¹	A	(I _A /I _N)	(MM/MN)	kg
4KTC 71 A-4/2	0.09 0.37	1320 2740	0.35 1.1	2.8 3.6	1.7 1.5	16
4KTC 71 B-4/2	0.14 0.5	1330 2800	0.5 1.3	2.7 4.3	1.9 2.9	16
4KTC 80 A-4/2	0.17 0.75	1400 2810	0.58 1.85	3.6 4.7	2.2 2.1	25
4KTC 80 B-4/2	0.2 0.95	1385 2780	0.64 2.5	3.8 4.2	1.8 1.9	28
4KTC 90 S-4/2	0.37 1.4	1430 2810	0.8 3.1	5.6 5.3	2.4 2.0	34
4KTC 90 L-4/2	0.5 2.0	1445 2880	1.2 4.6	5.8 6.4	2.4 2.2	36
4KTC 100 LA-4/2	0.6 2.6	1430 2880	1.6 5.7	5.3 6.5	2.2 1.7	45
4KTC 100 LB-4/2	0.85 3.2	1410 2870	2.0 6.8	4.7 5.7	1.8 2.0	49
4KTC 112 M-4/2	1.1 4.4	1450 2880	2.5 8.5	6.2 6.6	2.1 2.0	64
4KTC 132 S-4/2	1.7 6.0	1455 2890	3.8 12.4	5.9 6.3	2.0 2.3	89
4KTC 132 M-4/2	2.0 8.0	1450 2920	4.2 18.0	7.0 7.3	1.9 2.1	99
4KTC 160 M-4/2	2.9 11.0	1450 2920	6.2 24.5	7.0 7.1	1.9 2.1	169

Selection chart

Type	Power	Speed	In 400 V	Starting current	Max. torque	Weight
	kW	min ⁻¹	A	(I _A /I _N)	(MM/MN)	kg
4KTC 160 L-4/2	3.8 15.5	1450 2920	7.4 31	7.9 8.1	2.2 2.2	189
4KTC 180 M-4/2	5 18	1460 2930	12 34	7 7.2	2 2	220
4KTC 180 L-4/2	6 24	1450 2925	14.5 44	7.2 7.3	2.1 2.1	240
4KTC 200 L-4/2	8 30	1460 2940	18.5 57	7.2 7.3	1.9 2	260
4KTC 225 S-4/2	9.2 37	1460 2960	21 68	7 7.3	2 2.1	320
4KTC 225 M-4/2	11.5 44	1450 2970	23 81	7 7.2	2 2	400
5KTC 250 M-4/2	15 55	1470 2950	29 97	5 6.3	2 2.2	490
4KTC 280 S-4/2	20 75	1475 2965	36 125	5.5 7	1.8 2	610
4KTC 280 M-4/2	24 90	1480 2970	44 149	5.6 7.4	1.9 2.2	685
4KTC 315 S-4/2	27 110	1485 2980	48 179	5 6.2	1.3 1.2	820
4KTC 315 MA-4/2	33 132	1485 2980	59 215	5 6.2	1.3 1.2	930
4KTC 315 MB-4/2	37 145	1485 2980	70 237	5.2 6.8	1.2 1.2	1240



Three-phase motor with short-circuit rotor

Pole number 8/4

Y/YY 380 to 415 V 50 Hz

Protection class

IP 55

Temperature class

T1 to T4

Thermal class

F

Explosion protection  II 2G Ex d IIC T4,  II 2G Ex de IIC T4,  II 2D Ex tD A21 IP 65 T135 °C													
Type	4KTC or 4KTCD										5KTC	4KTC	
Frame size	63	71	80	90	100	112	132	160	180	200	225	250	280 315
PTB 07 ATEX 1036 X	●												
PTB 10 ATEX 1006 X		●						●					
PTB 10 ATEX 1028 X			●	●	●	●	●						
PTB 09 ATEX 1121 X									●				
PTB 09 ATEX 1119 X										●			
PTB 09 ATEX 1120 X											●		
PTB 11 ATEX 1034 X												●	
PTB 09 ATEX 1122 X													●
PTB 09 ATEX 1123 X													●

Selection chart

Type	Power	Speed	In 400 V	Starting current	Max. torque	Weight
	kW	min ⁻¹	A	(IA/IN)	(MM/MN)	
4KTC 71 A-8/4	0.05	700	0.39	1.7	1.4	16
	0.2	1420	0.82	3.5	1.8	
4KTC 71 B-8/4	0.07	680	0.44	1.8	1.6	17
	0.3	1390	0.95	3.6	1.8	
4KTC 80 A-8/4	0.1	690	0.53	2.4	1.7	25
	0.45	1425	1.45	4.7	2.4	
4KTC 80 B-8/4	0.13	690	0.69	2.35	1.9	28
	0.6	1435	1.9	4.7	2.7	
4KTC 90 S-8/4	0.18	700	0.76	2.8	1.8	34
	0.8	1415	1.9	5.0	2.0	
4KTC 90 L-8/4	0.3	700	1.24	3.0	2.0	36
	1.2	1435	2.9	5.6	2.3	
4KTC 100 LA-8/4	0.33	710	1.45	3.1	1.3	45
	1.6	1435	3.7	5.1	1.5	
4KTC 100 LB-8/4	0.55	695	2.0	2.8	1.6	49
	2.2	1430	4.9	5.0	1.8	
4KTC 112 M-8/4	0.75	705	2.44	3.2	1.7	64
	3.0	1440	6.1	6.5	2.0	
4KTC 132 S-8/4	1.1	710	3.5	2.8	1.5	89
	4.4	1450	9.0	5.3	2.0	
4KTC 132 M-8/4	1.3	720	4.0	3.5	3.1	99
	5.1	1460	10.2	6.9	2.6	
4KTC 160 MA-8/4	1.8	725	4.6	5.3	1.8	155
	7.5	1465	14.8	7.6	2.0	

Selection chart

Type	Power	Speed	In 400 V	Starting current	Max. torque	Weight
	kW	min ⁻¹	A	(IA/IN)	(MM/MN)	
4KTC 160 MB-8/4	3.0	725	10.0	3.3	1.9	165
	10.0	1470	22.0	6.6	2.7	
4KTC 180 M-8/4	4.0	735	13.0	4.5	1.9	220
	16.0	1465	30.0	6.1	2.4	
4KTC 180 L-8/4	4.5	730	14.5	4.0	2.1	240
	19.0	1470	38.5	6.6	2.4	
4KTC 200 L-8/4	6.2	720	14.5	4.4	2.2	260
	25.0	1470	46.0	6.8	2.3	
4KTC 225 S-8/4	7.5	725	19.0	4.6	2.3	320
	30.0	1470	60.0	6.7	2.4	
4KTC 225 M-8/4	9.0	730	22.0	4.8	2.4	400
	37.0	1475	67.0	7.0	2.8	
5KTC 250 M-8/4	12.0	730	24.5	5.0	2.2	490
	48.0	1475	82.0	5.8	2.4	
4KTC 280 S-8/4	16.0	740	42.0	4.3	1.8	610
	65.0	1485	127.0	7.5	2.1	
4KTC 280 M-8/4	20.0	740	48.0	4.3	1.8	685
	80.0	1485	140.0	7.5	2.2	
4KTC 315 S-8/4	24.0	735	45.0	4.6	1.4	820
	98.0	1485	165.0	7.0	1.8	
4KTC 315 M-8/4	30.0	740	52.0	4.6	1.4	930
	120.0	1485	196.0	7.0	1.8	



Three-phase motor with short-circuit rotor

Pole number 6/4

Y/Y 380 to 415 V 50 Hz

Protection class

IP 55

Temperature class

T1 to T4

Thermal class

F

Explosion protection II 2G Ex d IIC T4, II 2G Ex de IIC T4, II 2D Ex td A21 IP 65 T135 °C													
Type	4KTC or 4KTCD										5KTC	4KTC	
Frame size	63	71	80	90	100	112	132	160	180	200	225	250	280 315
PTB 07 ATEX 1036 X	●												
PTB 10 ATEX 1006 X		●						●					
PTB 10 ATEX 1028 X			●	●	●	●	●						
PTB 09 ATEX 1121 X									●				
PTB 09 ATEX 1119 X										●			
PTB 09 ATEX 1120 X											●		
PTB 11 ATEX 1034 X												●	
PTB 09 ATEX 1122 X													●
PTB 09 ATEX 1123 X													●

Selection chart

Type	Power kW	Speed min ⁻¹	In 400 V A	Starting current (IA/IN)	Max. torque (MM/MN)	Weight kg
4KTC 71 B-6/4	0.1 0.3	960 1450	0.83 1.0	2.8 4.0	1.9 2.1	16
4KTC 80 A-6/4	0.13 0.44	930 1430	0.49 1.4	3.8 4.2	1.2 1.6	25
4KTC 80 B-6/4	0.18 0.59	950 1430	0.67 1.6	3.6 4.0	1.9 1.7	28
4KTC 90 S-6/4	0.29 0.8	950 1430	1.05 2.2	3.4 4.3	1.5 1.5	34
4KTC 90 L-6/4	0.37 1.1	960 1430	1.38 2.65	3.7 5.2	2.4 2.0	36
4KTC 100 LA-6/4	0.5 1.5	960 1440	1.65 3.6	3.6 4.8	1.6 1.6	45
4KTC 100 LB-6/4	0.75 2.2	970 1460	3.1 6.8	4.0 5.4	1.6 1.8	49
4KTC 112 M-6/4	0.9 3.0	940 1445	2.43 6.4	4.1 4.8	1.7 1.6	64
4KTC 132 S-6/4	1.2 4.0	980 1460	4.6 9.5	5.1 6.5	1.7 2.0	89
4KTC 132 M-6/4	1.7 5.5	960 1460	6.1 13	5.5 6.8	2.0 1.9	99
4KTC 160 M-6/4	2.5 7.5	980 1465	7.4 16.5	6.0 7.4	2.2 2.1	155
4KTC 160 L-6/4	3.3 11.0	985 1475	8.8 23.1	6.0 7.3	2.7 2.6	197

Selection chart

Type	Power kW	Speed min ⁻¹	In 400 V A	Starting current (IA/IN)	Max. torque (MM/MN)	Weight kg
4KTC 180 M-6/4	5.2 15.0	960 1450	12.0 31.5	6.0 6.9	1.6 1.8	220
4KTC 180 L-6/4	6.2 18.5	965 1450	14.5 36.0	6.2 7.0	1.6 1.8	240
4KTC 200 L-6/4	8.8 25.0	970 1465	18.5 48.5	6.2 6.4	2.1 2.1	260
4KTC 225 S-6/4	11.0 30.0	985 1480	23.7 57.0	6.25 6.2	2.1 2.1	320
4KTC 225 M-6/4	14.0 38.0	980 1470	30.0 71.0	6.0 6.1	2.0 2.1	400
5KTC 250 M-6/4	18.0 52.0	985 1480	34.0 87.0	6.5 7.5	2.3 2.4	490
4KTC 280 S-6/4	25.0 70.0	985 1480	45.0 126.0	6.5 7.0	1.9 1.7	610
4KTC 280 M-6/4	30.0 80.0	985 1485	55.0 141.0	6.5 7.0	2.0 1.8	685
4KTC 315 S-6/4	40.0 105.0	985 1480	63.0 170.0	6.0 6.0	2.4 2.0	820
4KTC 315 M-6/4	50.0 120.0	985 1480	70.0 200.	6.0 7.0	2.3 2.2	930



Three-phase motor with short-circuit rotor

Pole number 4/2

Y/YY 440 to 480 V 60 Hz

Protection class

IP 55

Temperature class

T1 to T4

Thermal class

F

Explosion protection II 2G Ex d IIC T4, II 2G Ex de IIC T4, II 2D Ex tD A21 IP 65 T135 °C													
Type	4KTC or 4KTCD											5KTC	4KTC
Frame size	63	71	80	90	100	112	132	160	180	200	225	250	280 315
PTB 07 ATEX 1036 X	●												
PTB 10 ATEX 1006 X		●						●					
PTB 10 ATEX 1028 X			●	●	●	●	●						
PTB 09 ATEX 1121 X									●				
PTB 09 ATEX 1119 X										●			
PTB 09 ATEX 1120 X											●		
PTB 11 ATEX 1034 X												●	
PTB 09 ATEX 1122 X													●
PTB 09 ATEX 1123 X													●

Selection chart

Type	Power kW	Speed min ⁻¹	In 440 V A	Starting current (IA/IN)	Max. torque (MM/MN)	Weight kg
4KTC 71 A-4/2	0.1 0.4	1585 3290	0.35 1.1	2.7 3.4	1.6 1.4	16
4KTC 71 B-4/2	0.15 0.55	1600 3360	0.5 1.3	2.6 4.1	1.8 2.7	16
4KTC 80 A-4/2	0.18 0.9	1690 3355	0.51 1.94	4.0 3.8	2.7 2.2	25
4KTC 80 B-4/2	0.27 1.1	1660 3340	0.64 2.5	3.6 4.0	1.7 1.8	28
4KTC 90 S-4/2	0.4 1.5	1720 3370	0.8 3.1	5.3 5.0	2.2 1.9	34
4KTC 90 L-4/2	0.55 2.2	1730 3460	1.2 4.6	5.5 6.1	2.2 2.0	36
4KTC 100 LA-4/2	0.65 2.9	1720 3460	1.6 5.7	5.0 6.2	2.0 1.6	45
4KTC 100 LB-4/2	0.95 3.5	1690 3440	2.0 6.8	4.5 5.4	1.7 1.9	49
4KTC 112 M-4/2	1.2 4.8	1740 3460	2.5 8.5	5.9 6.3	2.0 1.9	64
4KTC 132 S-4/2	1.9 6.6	1750 3470	3.8 12.4	5.6 6.0	1.9 2.1	89
4KTC 132 M-4/2	2.2 8.8	1740 3500	4.2 18.0	6.6 7.0	1.8 2.0	99
4KTC 160 M-4/2	3.2 12.6	1740 3500	6.2 24.5	6.6 6.7	1.8 2.0	169

Selection chart

Type	Power kW	Speed min ⁻¹	In 440 V A	Starting current (IA/IN)	Max. torque (MM/MN)	Weight kg
4KTC 160 L-4/2	4.2 17.0	1740 3500	7.4 31.0	7.5 7.7	2.0 2.0	189
4KTC 180 M-4/2	5.5 20.0	1750 3520	12.0 34.0	6.6 6.8	1.9 1.9	220
4KTC 180 L-4/2	6.6 26.0	1740 3510	14.5 44.0	6.8 6.9	2.0 2.0	240
4KTC 200 L-4/2	8.8 33.0	1750 3530	18.5 57.0	6.8 6.9	1.8 1.9	260
4KTC 225 S-4/2	10.0 41.0	1750 3550	21.0 68.0	6.6 6.9	1.9 2.0	320
4KTC 225 M-4/2	12.5 48.0	1740 3560	23.0 81.0	6.6 6.8	1.9 1.9	400
5KTC 250 M-4/2	16.5 60.0	1760 3540	29.0 97.0	4.8 6.0	1.9 2.0	490
4KTC 280 S-4/2	22.0 82.0	1770 3560	36.0 125.0	5.2 6.6	1.7 1.9	610
4KTC 280 M-4/2	26.0 100.0	1780 3560	44.0 149.0	5.3 7.0	1.8 2.0	685
4KTC 315 S-4/2	30.0 120.0	1780 3580	48.0 179.0	4.7 5.9	1.2 1.1	820
4KTC 315 MA-4/2	36.0 145.0	1780 3580	59.0 215.0	4.7 5.9	1.2 1.1	930
4KTC 315 MB-4/2	40.0 160.0	1780 3580	70.0 237.0	5.0 6.5	1.1 1.1	1240



Three-phase motor with short-circuit rotor

Pole number 8/4

Y/YY 440 to 480 V 60 Hz

Protection class IP 55
 Temperature class T1 to T4
 Thermal class F

Explosion protection II 2G Ex d IIC T4, II 2G Ex de IIC T4, II 2D Ex tD A21 IP 65 T135 °C													
Type	4KTC or 4KTCD											5KTC	4KTC
Frame size	63	71	80	90	100	112	132	160	180	200	225	250	280 315
PTB 07 ATEX 1036 X	●												
PTB 10 ATEX 1006 X		●						●					
PTB 10 ATEX 1028 X			●	●	●	●	●						
PTB 09 ATEX 1121 X									●				
PTB 09 ATEX 1119 X										●			
PTB 09 ATEX 1120 X											●		
PTB 11 ATEX 1034 X												●	
PTB 09 ATEX 1122 X													●
PTB 09 ATEX 1123 X													●

Selection chart

Type	Power kW	Speed min ⁻¹	In 440 V A	Starting current (I _A /I _N)	Max. torque (MM/MN)	Weight kg
4KTC 71 A-8/4	0.06 0.22	840 1700	0.39 0.82	1.6 3.3	1.3 1.7	16
4KTC 71 B-8/4	0.08 0.33	820 1670	0.44 0.95	1.7 3.4	1.5 1.7	17
4KTC 80 A-8/4	0.11 0.5	830 1710	0.53 1.45	2.3 4.5	1.6 2.2	25
4KTC 80 B-8/4	0.14 0.65	830 1720	0.69 1.9	2.2 4.5	1.8 2.5	28
4KTC 90 S-8/4	0.2 0.9	840 1700	0.76 1.9	4.8 2.7	1.7 1.9	34
4KTC 90 L-8/4	0.33 1.32	834 1715	1.16 2.9	3.4 5.15	2.1 2.7	36
4KTC 100 LA-8/4	0.45 2.0	840 1705	1.4 3.95	2.9 4.7	1.2 1.4	45
4KTC 100 LB-8/4	0.6 2.4	845 1730	2.15 5.1	3.0 5.5	2.1 2.7	49
4KTC 112 M-8/4	0.8 3.3	850 1730	2.44 6.1	3.0 6.2	1.6 1.9	64
4KTC 132 S-8/4	1.2 4.8	850 1740	3.5 9.0	2.7 5.0	1.4 1.9	89
4KTC 132 M-8/4	1.15 5.75	865 1745	3.45 10.4	3.7 6.5	2.9 2.4	99
4KTC 160 MA-8/4	1.6 8.0	875 1755	4.0 14.2	5.6 7.3	1.7 1.9	155

Selection chart

Type	Power kW	Speed min ⁻¹	In 440 V A	Starting current (I _A /I _N)	Max. torque (MM/MN)	Weight kg
4KTC 160 MB-8/4	3.3 11.0	870 1760	10.0 22.0	3.1 6.3	1.8 2.5	165
4KTC 180 M-8/4	4.4 17.6	875 1765	11.2 31.0	3.8 6.5	1.7 2.3	220
4KTC 180 L-8/4	4.5 18.0	880 1775	12.8 33.0	4.0 7.6	2.0 2.2	240
4KTC 200 L-8/4	6.0 30.0	885 1775	14.3 51.0	6.4 8.7	2.0 2.1	260
4KTC 225 S-8/4	9.0 35.0	870 1760	19.0 60.0	4.4 6.4	2.1 2.2	320
4KTC 225 M-8/4	10.0 41.0	880 1770	22.0 67.0	4.6 6.7	2.2 2.6	400
5KTC 250 M-8/4	11.0 50.0	880 1770	24.5 82.0	4.8 5.5	2.0 2.2	490
4KTC 280 S-8/4	19.0 75.0	890 1780	42.0 127.0	4.1 7.1	1.7 2.0	610
4KTC 280 M-8/4	22.0 88.0	890 1780	48.0 140.0	4.1 7.1	1.7 2.0	685
4KTC 315 S-8/4	24.0 105.0	880 1780	45.0 165.0	4.4 6.7	1.3 1.7	820
4KTC 315 M-8/4	29.0 126.0	890 1780	52.0 196.0	4.4 6.7	1.3 1.7	930



Three-phase motor with short-circuit rotor

Pole number 6/4

Y/Y 440 to 480 V 60 Hz

Protection class

IP 55

Temperature class

T1 to T4

Thermal class

F

Explosion protection															II 2G Ex d IIC T4,															II 2G Ex de IIC T4,															II 2D Ex td A21 IP 65 T135 °C														
Type	4KTC or 4KTCD															5KTC			4KTC																																								
Frame size	63	71	80	90	100	112	132	160	180	200	225	250	280	315																																													
PTB 07 ATEX 1036 X	●																																																										
PTB 10 ATEX 1006 X		●						●																																																			
PTB 10 ATEX 1028 X			●	●	●	●	●																																																				
PTB 09 ATEX 1121 X									●																																																		
PTB 09 ATEX 1119 X										●																																																	
PTB 09 ATEX 1120 X											●																																																
PTB 11 ATEX 1034 X												●																																															
PTB 09 ATEX 1122 X													●																																														
PTB 09 ATEX 1123 X														●																																													

Selection chart

Type	Power kW	Speed min ⁻¹	In 440 V A	Starting current (IA/IN)	Max. torque (MM/MN)	Weight kg
4KTC 71 B-6/4	0.11 0.33	1150 1740	0.83 1.0	2.7 1.0	1.8 2.0	16
4KTC 80 A-6/4	0.14 0.48	1120 1720	0.49 1.4	3.6 4.0	1.1 1.5	25
4KTC 80 B-6/4	0.2 0.65	1140 1720	0.67 1.6	3.4 3.8	1.8 1.6	28
4KTC 90 S-6/4	0.32 0.88	1140 1720	1.05 2.2	3.2 4.1	1.4 1.4	34
4KTC 90 L-6/4	0.4 1.2	1150 1720	1.38 2.65	3.5 4.9	2.2 1.9	36
4KTC 100 LA-6/4	0.55 1.65	1150 1730	1.65 3.6	3.4 4.6	1.5 1.5	45
4KTC 100 LB-6/4	0.82 2.4	1160 1750	3.1 6.8	3.8 5.1	1.5 1.7	49
4KTC 112 M-6/4	1.0 3.3	1130 1730	2.43 6.4	3.9 4.6	1.6 1.5	64
4KTC 132 S-6/4	1.3 4.4	1180 1750	4.6 9.5	4.8 6.2	1.6 1.9	89
4KTC 132 M-6/4	1.9 6.0	1150 1750	6.1 13	5.2 6.5	1.9 1.8	99
4KTC 160 M-6/4	2.7 8.2	1180 1760	7.4 16.5	5.7 7.0	2.0 2.0	155
4KTC 160 L-6/4	3.6 12.0	1180 1770	8.8 23.1	5.7 6.9	2.5 2.4	197

Selection chart

Type	Power kW	Speed min ⁻¹	In 440 V A	Starting current (IA/IN)	Max. torque (MM/MN)	Weight kg
4KTC 180 M-6/4	5.7 16.5	1150 1740	12.0 31.5	5.7 6.6	1.5 1.7	220
4KTC 180 L-6/4	6.8 20.0	1160 1740	14.5 36.0	5.9 6.6	1.5 1.7	240
4KTC 200 L-6/4	10.0 28.0	1160 1760	18.5 48.5	5.9 6.1	2.0 2.0	260
4KTC 225 S-6/4	12.0 33.0	1180 1780	23.7 57.0	5.9 6.2	2.0 2.0	320
4KTC 225 M-6/4	15.0 42.0	1180 1760	30.0 71.0	5.7 5.8	1.9 2.0	400
5KTC 250 M-6/4	19.0 53.0	1180 1780	34.0 87.0	6.2 7.1	2.1 2.2	490
4KTC 280 S-6/4	27.0 77.0	1180 1780	45.0 126.0	6.2 6.7	1.8 1.6	610
4KTC 280 M-6/4	33.0 90.0	1180 1780	55.0 141.0	6.2 6.7	1.9 1.7	685
4KTC 315 S-6/4	35.0 105.0	1180 1780	63.0 170.0	5.7 5.7	2.2 1.9	820
4KTC 315 M-6/4	41.0 126.0	1180 1780	70.0 200.0	5.7 6.7	2.1 2.0	930



Three-phase electric motors driven by frequency inverters

General description

The asynchronous motor with its short-circuit rotor and robust construction offers an excellent price-performance ratio. AC motors are designed for constant speed operation. It is not possible to change speed when they are running on fixed frequency supplies. There are drives which require the additional flexibility of smooth speed variations and this is best achieved with the use of an inverter.

Frequency inverters provide an excellent speed and the speed can be varied continuously over the entire frequency range. To avoid overheating, three PTC elements are built into the head of the winding. As the speed rises (higher frequency), the motor becomes louder. Voltage type frequency inverters cause a noise increase of about 7 to 15 dB, current type ones of about 3 dB.

We strongly recommend that you indicate frequency range and working characteristics of the motor ($T = f(n)$ or $P = f(n)$) when placing your order.

Power and torque characteristics of motors driven by frequency inverters


We distinguish two ranges:

■ 0 to 50 Hz range

Here the motor develops its normal torque on the shaft at 5 to 10 Hz of the output frequency (10 to 20 % of the nominal speed). The motor maintains the nominal torque at the shaft until the frequency reaches 50 Hz (100 % of the nominal speed). Voltage keeps rising while the magnetic flux is kept constant. The power increase in this range is linear to the revolutions ($P = k \times M \times n$).

■ 50 to 87 Hz range

Here the torque falls parallel to the speed. The voltage of the motor is maintained on a constant level while the magnetic flux is weaker. The current level is maintained and independent of the speed.

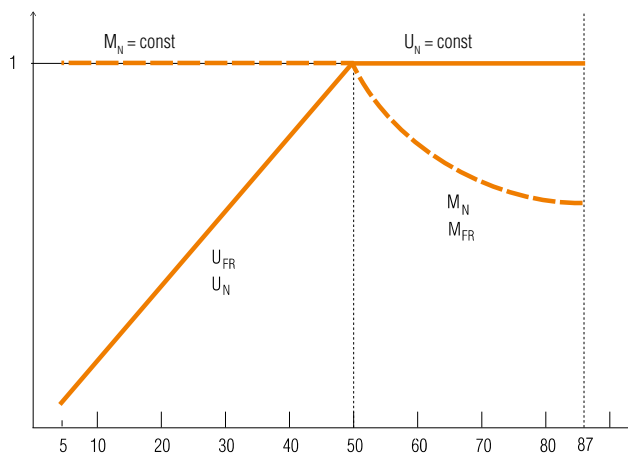

U_N = net voltage

U_{FR} = voltage of frequency inverter

M_N = motor torque on net

M_{FR} = motor torque on frequency inverter



Three-phase motor with short-circuit rotor

Pole number 2

Explosion protection: II 2G Ex d IIC T4 or II 2G Ex de IIC T4

Selection chart

Operating	net	frequency inverter						
Cooling	own	own	own	own	own	own	forced cooling	own
Torque		T - n ²	constant	constant	constant	constant	constant	constant
Frequency	50 Hz	5 to 50 Hz	20 to 50 Hz	10 to 50 Hz	5 to 50 Hz	50 to 87 Hz	5 to 87 Hz	50 to 87 Hz*
Ratio		1 : 10	1 : 2.5	1 : 5	1 : 10	1 : 1.74	1 : 17.4	1 : 1.74
RPM		300 - 3000 min ⁻¹	1200 - 3000 min ⁻¹	600 - 3000 min ⁻¹	300 - 3000 min ⁻¹	3000 - 5220 min ⁻¹	300 - 5220 min ⁻¹	3000 - 5220 min ⁻¹
V/f		U/f = const	U/f = const	U/f = const	U/f = const	U = const	U = const	U/f = const**

* range 60 to 87 Hz, motors with steel fan ** U = 230/400 V

Type	Power kW	Power 50 Hz	Torque Nm	Power 50 Hz	Torque Nm	Power 50 Hz	Torque Nm	Power 50 Hz	Torque Nm	Power 87 Hz	Torque Nm	Power 87 Hz	Torque Nm	Power 87 Hz	Torque Nm
4KTC 71	A-2	0.37	0.35	1.12	0.32	1.07	0.3	0.97	0.22	0.74	0.35	0.65	0.35	0.65	1.12
	B-2	0.55	0.53	1.7	0.47	1.62	0.45	1.47	0.33	1.1	0.53	0.98	0.53	0.98	1.7
4KTC 80	A-2	0.75	0.72	2.3	0.65	2.2	0.6	2.0	0.5	1.7	0.7	1.33	0.7	1.33	2.3
	B-2	1.1	1.0	3.4	0.95	3.25	0.9	3.0	0.75	2.5	1.1	2.0	1.1	2.0	3.4
4KTC 90	S-2	1.5	1.4	4.5	1.3	4.3	1.2	4.0	1.0	3.3	1.4	2.6	1.4	2.6	4.5
	L-2	2.2	2.1	6.7	1.9	6.4	1.7	5.7	1.4	4.7	2.1	3.8	2.1	3.8	6.7
4KTC 100	L-2	3.0	2.8	9.0	2.6	8.6	2.2	7.2	1.8	5.9	2.8	5.2	2.8	5.2	9.0
4KTC 112	M-2	4.0	3.8	12.0	3.4	11.4	3.2	10.4	2.5	8.2	3.8	6.9	3.8	6.9	12.0
4KTC 132	SA-2	5.5	5.1	16.3	4.7	15.6	4.5	14.1	3.7	12.0	5.1	9.4	5.1	9.4	16.3
	SB-2	7.5	6.9	22.0	6.5	21.1	6.0	19.1	5.0	16.0	7.0	12.7	7.0	12.7	22.0
4KTC 160	MA-2	11.0	10.0	32.2	9.5	30.8	8.8	27.9	7.5	24.0	10.2	18.6	10.2	18.6	32.2
	MB-2	15.0	13.5	43.8	12.9	41.9	12.0	38.0	10.0	32.0	13.8	25.3	13.8	25.3	43.8
	L-2	18.5	16.6	54.0	15.9	51.6	15.0	46.8	12.0	41.0	17.0	31.2	17.0	31.2	54.0
4KTC 180	M-2	22.0	20.0	64.4	18.9	61.5	18.0	55.8	15.0	49.0	20.3	37.2	20.3	37.2	64.4
4KTC 200	LA-2	30.0	27.0	87.0	25.8	83.4	24.0	75.7	21.0	68.0	27.6	50.4	27.6	50.4	87.0
	LB-2	37.0	33.0	107.0	31.8	102.4	28.0	90.0	26.0	84.0	34.0	62.0	34.0	62.0	107.0
4KTC 225	M-2	45.0	40.0	130.0	37.0	119.0	34.0	110.0	32.0	101.0	-	-	-	-	-
5KTC 250	M-2	55.0	50.0	159.0	45.0	145.0	43.0	138.0	39.0	124.0	-	-	-	-	-
4KTC 280	S-2	75.0	67.0	217.0	60.0	193.0	58.0	186.0	53.0	169.0	-	-	-	-	-
	M-2	90.0	81.0	260.0	73.0	234.0	70.0	225.0	63.0	202.0	-	-	-	-	-
4KTC 315	S-2	110.0	100.0	318.0	90.0	288.0	88.0	282.0	78.0	247.0	-	-	-	-	-
	MA-2	132.0	119.0	382.0	110.0	353.0	105.0	331.0	93.0	297.0	-	-	-	-	-
	MA-2	160.0	144.0	458.0	135.0	433.0	125.0	398.0	112.0	358.0	-	-	-	-	-
	L-2	200.0	180.0	575.0	165.0	528.0	156.0	498.0	140.0	447.0	-	-	-	-	-



Three-phase motor with short-circuit rotor

Pole number 4

Explosion protection: Ⓔ II 2G Ex d IIC T4 or Ⓔ II 2G Ex de IIC T4

Selection chart

Operating	net	frequency inverter						
Cooling	own	own	own	own	own	own	forced cooling	own
Torque		T - n ²	constant	constant	constant	constant	constant	constant
Frequency	50 Hz	5 to 50 Hz	20 to 50 Hz	10 to 50 Hz	5 to 50 Hz	50 to 87 Hz	5 to 87 Hz	50 to 87 Hz*
Ratio		1 : 10	1 : 2.5	1 : 5	1 : 10	1 : 1.74	1 : 17.4	1 : 1.74
RPM		150 - 1500 min ⁻¹	600 - 1500 min ⁻¹	300 - 1500 min ⁻¹	150 - 1500 min ⁻¹	1500 - 2610 min ⁻¹	150 - 2610 min ⁻¹	1500 - 2610 min ⁻¹
V/f		U/f = const	U/f = const	U/f = const	U/f = const	U = const	U = const	U/f = const**

* range 60 to 87 Hz, motors with steel fan ** U = 230/400 V

Type		Power kW	Power 50 Hz	Torque Nm	Power 50 Hz	Torque Nm	Power 50 Hz	Torque Nm	Power 50 Hz	Torque Nm	Power 87 Hz	Torque Nm	Power 87 Hz	Torque Nm	Power 87 Hz	Torque Nm
KTC 71	A-4	0.25	0.25	1.57	0.23	1.5	0.21	1.35	0.19	1.2	0.25	0.9	0.25	0.9	0.43	1.57
	B-4	0.37	0.36	2.3	0.34	2.2	0.31	2.0	0.28	1.8	0.35	1.3	0.35	1.3	0.63	2.3
4KTC 80	A-4	0.55	0.53	3.38	0.5	3.2	0.45	2.9	0.4	2.6	0.55	2.0	0.55	2.0	0.92	3.38
	B-4	0.75	0.72	4.6	0.69	4.4	0.62	4.0	0.56	3.6	0.71	2.6	0.71	2.6	1.2	4.6
4KTC 90	S-4	1.1	1.05	6.7	1.0	6.4	0.9	5.8	0.8	5.2	1.05	3.9	1.05	3.9	1.8	6.7
	L-4	1.5	1.4	9.1	1.4	8.7	1.2	7.9	1.1	7.1	1.4	5.2	1.4	5.2	2.5	9.1
4KTC 100	LA-4	2.2	2.1	13.4	2.0	12.8	1.8	11.6	1.6	10.4	2.1	7.7	2.1	7.7	3.6	13.4
	LB-4	3.0	2.8	18.2	2.7	17.4	2.5	15.7	2.2	14.1	2.9	10.5	2.9	10.5	5.0	18.2
4KTC 112	M-4	4.0	3.8	24.0	3.6	22.9	3.2	20.7	2.9	18.6	3.8	13.8	3.8	13.8	6.5	24.0
4KTC 132	S-4	5.5	5.2	33.0	5.0	31.5	4.5	28.5	4.0	25.6	5.2	19.0	5.2	19.0	9.0	33.0
	M-4	7.5	7.0	44.5	6.7	42.6	6.0	38.6	5.4	34.6	7.0	25.7	7.0	25.7	12.0	44.5
4KTC 160	M-4	11.0	10.0	64.5	9.7	61.7	8.8	56.0	7.8	50.0	10.2	37.3	10.2	37.3	17.0	64.5
	L-4	15.0	14.0	88.0	13.2	84.0	12.0	76.3	10.7	68.0	13.9	50.8	13.9	50.8	24.0	88.0
4KTC 180	M-4	18.5	17.0	108.5	16.3	104.0	14.8	94.0	13.2	84.0	17.1	62.7	17.1	62.7	30.0	108.5
	L-4	22.0	20.0	129.0	19.3	123.0	17.6	112.0	15.7	100.0	20.4	74.5	20.4	74.5	35.0	129.0
4KTC 200	L-4	30.0	28.0	176.0	26.4	168.0	23.9	152.0	21.0	136.0	27.7	101.5	27.7	101.5	48.0	176.0
4KTC 225	S-4	37.0	34.0	216.0	32.3	206.0	29.4	187.0	26.0	168.0	34.2	125.0	34.2	125.0	-	-
	M-4	45.0	41.0	262.0	39.3	250.0	35.6	227.0	32.0	204.0	41.0	151.0	41.0	151.0	-	-
5KTC 250	M-4	55.0	50.0	320.0	48.0	305.0	43.5	277.0	39.0	248.0	50.0	185.0	50.0	185.0	-	-
4KTC 280	S-4	75.0	68.0	434.0	65.0	415.0	59.0	376.0	53.0	337.0	68.0	250.0	68.0	250.0	-	-
	M-4	90.0	82.0	520.0	78.0	497.0	70.0	450.0	64.0	405.0	82.0	300.0	82.0	300.0	-	-
4KTC 315	S-4	110.0	100.0	635.0	95.0	607.0	86.0	550.0	77.0	494.0	100.0	367.0	100.0	367.0	-	-
	MA-4	132.0	120.0	766.0	115.0	732.0	104.0	664.0	94.0	596.0	121.0	442.0	121.0	442.0	-	-
	MB-4	160.0	145.0	924.0	138.0	883.0	126.0	801.0	113.0	719.0	146.0	534.0	146.0	534.0	-	-
	L-4	200.0	180.0	1154.0	173.0	1102.0	157.0	1000.0	140.0	897.0	182.0	666.0	182.0	666.0	-	-



Three-phase motor with short-circuit rotor

Pole number 6

Explosion protection: II 2G Ex d IIC T4 or II 2G Ex de IIC T4

Selection chart

Operating	net	frequency inverter						
Cooling	own	own	own	own	own	own	forced cooling	own
Torque		T - n ²	constant	constant	constant	constant	constant	constant
Frequency	50 Hz	5 to 50 Hz	20 to 50 Hz	10 to 50 Hz	5 to 50 Hz	50 to 87 Hz	5 to 87 Hz	50 to 87 Hz*
Ratio		1 : 10	1 : 2.5	1 : 5	1 : 10	1 : 1.74	1 : 17.4	1 : 1.74
RPM		100 - 1000 min ⁻¹	400 - 1000 min ⁻¹	200 - 1000 min ⁻¹	100 - 1000 min ⁻¹	1000 - 1740 min ⁻¹	100 - 1740 min ⁻¹	1000 - 1740 min ⁻¹
V/f		U/f = const	U/f = const	U/f = const	U/f = const	U = const	U = const	U/f = const**

* range 60 to 87 Hz, motors with steel fan ** U = 230/400 V

Type	Power kW	Power 50 Hz	Torque Nm	Power 50 Hz	Torque Nm	Power 50 Hz	Torque Nm	Power 50 Hz	Torque Nm	Power 87 Hz	Torque Nm	Power 87 Hz	Torque Nm	Power 87 Hz	Torque Nm
4KTC 71 B-6	0.25	0.24	2.3	0.23	2.2	0.21	2.0	0.19	1.8	0.24	1.3	0.24	1.3	0.42	2.3
4KTC 80 A-6	0.37	0.36	3.4	0.35	3.3	0.31	3.0	0.28	2.7	0.36	2.0	0.36	2.0	0.62	3.4
4KTC 80 B-6	0.55	0.53	5.1	0.51	4.9	0.46	4.4	0.42	4.0	0.55	3.0	0.55	3.0	0.93	5.1
4KTC 90 S-6	0.75	0.73	7.0	0.7	6.7	0.64	6.1	0.57	5.5	0.73	4.0	0.73	4.0	1.27	7.0
4KTC 90 L-6	1.1	1.08	10.3	1.04	9.9	0.94	9.0	0.84	8.0	1.1	6.0	1.1	6.0	1.9	10.3
4KTC 100 L-6	1.5	1.45	13.9	1.38	13.2	1.25	12.0	1.1	10.8	1.45	8.0	1.45	8.0	2.5	13.9
4KTC 112 M-6	2.2	2.05	19.7	2.0	18.8	1.8	17.0	1.6	15.3	2.1	11.4	2.1	11.4	3.6	19.7
4KTC 132 S-6	3.0	2.8	26.5	2.6	25.3	2.4	23.0	2.1	20.6	2.8	15.3	2.8	15.3	4.8	26.5
4KTC 132 MA-6	4.0	3.8	36.0	3.6	34.3	3.2	31.0	2.9	28.0	3.8	20.7	3.8	20.7	6.5	36.0
4KTC 132 MB-6	5.5	5.2	50.0	4.9	47.0	4.5	43.0	4.0	38.0	5.3	29.0	5.3	29.0	9.1	50.0
4KTC 160 M-6	7.5	7.0	67.0	6.7	64.0	6.0	58.0	5.4	52.0	6.9	38.0	6.9	38.0	12.2	67.0
4KTC 160 L-6	11.0	10.3	98.0	9.8	94.0	8.9	85.0	8.0	76.0	10.4	57.0	10.4	57.0	17.8	98.0
4KTC 180 L-6	15.0	14.0	133.0	13.0	127.0	12.0	115.0	10.9	104.0	14.0	77.0	14.0	77.0	24.2	133.0
4KTC 200 LA-6	18.5	17.3	165.0	16.0	157.0	15.0	143.0	13.4	128.0	17.3	95.0	17.3	95.0	30.0	165.0
4KTC 200 LB-6	22.0	20.6	197.0	19.0	188.0	17.8	170.0	16.0	153.0	20.8	114.0	20.8	114.0	36.0	197.0
4KTC 225 M-6	30.0	27.5	264.0	26.0	252.0	24.0	228.0	21.5	205.0	27.7	152.0	27.7	152.0	-	-
5KTC 250 M-6	37.0	34.0	323.0	32.0	308.0	29.0	280.0	26.0	251.0	34.0	187.0	34.0	187.0	-	-
4KTC 280 S-6	45.0	41.0	393.0	39.0	376.0	35.0	340.0	32.0	306.0	41.0	227.0	41.0	227.0	-	-
4KTC 280 M-6	55.0	50.0	481.0	48.0	459.0	43.0	416.0	39.0	374.0	50.0	278.0	50.0	278.0	-	-
4KTC 315 S-6	75.0	69.0	659.0	65.0	629.0	58.0	571.0	54.0	512.0	69.0	381.0	69.0	381.0	-	-
4KTC 315 MA-6	90.0	82.0	787.0	78.0	752.0	71.0	681.0	64.0	612.0	83.0	454.0	83.0	454.0	-	-
4KTC 315 MB-6	110.0	100.0	960.0	96.0	917.0	87.0	831.0	78.0	746.0	101.0	554.0	101.0	554.0	-	-
4KTC 315 L-6	132.0	120.0	1150.0	115.0	1100.0	104.0	997.0	94.0	895.0	121.0	665.0	121.0	665.0	-	-



Three-phase motor with short-circuit rotor

Pole number 8

Explosion protection: Ⓔ II 2G Ex d IIC T4 or Ⓔ II 2G Ex de IIC T4

Selection chart

Operating	net	frequency inverter						
Cooling	own	own	own	own	own	own	forced cooling	own
Torque		T - n ²	constant	constant	constant	constant	constant	constant
Frequency	50 Hz	5 to 50 Hz	20 to 50 Hz	10 to 50 Hz	5 to 50 Hz	50 to 87 Hz	5 to 87 Hz	50 to 87 Hz*
Ratio		1 : 10	1 : 2.5	1 : 5	1 : 10	-	-	1 : 1.74
RPM		75 - 750 min ⁻¹	300 - 750 min ⁻¹	150 - 750 min ⁻¹	75 - 750 min ⁻¹	750 - 1305 min ⁻¹	75 - 1305 min ⁻¹	750 - 1305 min ⁻¹
V/f		U/f = const	U/f = const	U/f = const	U/f = const	U = const	U = const	U/f = const**


* range 60 to 87 Hz, motors with steel fan ** U = 230/400 V

Type	Power kW	Power 50 Hz	Torque Nm	Power 50 Hz	Torque Nm	Power 50 Hz	Torque Nm	Power 50 Hz	Torque Nm	Power 50 Hz	Torque Nm	Power 87 Hz	Torque Nm	Power 87 Hz	Torque Nm	Power 87 Hz	Torque Nm
4KTC 71 B-8	0.12	0.12	1.57	0.11	1.5	0.11	1.4	0.09	1.2	0.12	0.9	0.12	0.9	0.21	1.57		
4KTC 80 A-8	0.18	0.18	2.3	0.17	2.2	0.16	2.0	0.14	1.8	0.18	1.3	0.18	1.3	0.31	2.3		
4KTC 80 B-8	0.25	0.25	3.2	0.23	3.0	0.21	2.7	0.2	2.5	0.25	1.8	0.25	1.8	0.44	3.2		
4KTC 90 S-8	0.37	0.37	4.7	0.35	4.5	0.31	4.0	0.28	3.6	0.37	2.7	0.37	2.7	0.64	4.7		
4KTC 90 L-8	0.55	0.54	6.9	0.52	6.6	0.47	6.0	0.42	5.4	0.55	4.0	0.55	4.0	0.94	6.9		
4KTC 100 LA-8	0.75	0.74	9.4	0.7	8.9	0.64	8.1	0.57	7.3	0.75	5.4	0.75	5.4	1.3	9.4		
4KTC 100 LB-8	1.1	1.05	13.5	1.0	12.9	0.92	11.7	0.82	10.5	1.1	7.8	1.1	7.8	1.8	13.5		
4KTC 112 M-8	1.5	1.4	18.2	1.35	17.4	1.24	15.8	1.1	14.1	1.4	10.5	1.4	10.5	2.5	18.2		
4KTC 132 S-8	2.2	2.1	26.6	2.0	25.5	1.8	23.1	1.6	20.7	2.1	15.4	2.1	15.4	3.6	26.6		
4KTC 132 M-8	3.0	2.8	36.4	27.0	35.0	2.5	31.5	2.2	28.3	2.9	21.0	2.9	21.0	5.0	36.4		
4KTC 160 MA-8	4.0	3.8	48.0	3.6	46.0	3.2	41.4	2.9	37.2	3.8	27.6	3.8	27.6	6.5	48.0		
4KTC 160 MB-8	5.5	5.2	66.0	4.9	63.0	4.5	57.4	4.0	51.5	5.2	38.3	5.2	38.3	9.0	66.0		
4KTC 160 L-8	7.5	7.0	89.0	6.7	85.0	6.0	77.0	5.4	69.2	7.0	51.4	7.0	51.4	12.0	89.0		
4KTC 180 L-8	11.0	10.4	132.0	9.9	126.0	9.0	115.0	8.0	103.0	10.4	76.0	10.4	76.0	18.0	132.0		
4KTC 200 L-8	15.0	13.8	176.0	13.2	168.0	12.0	153.0	10.8	137.0	14.0	102.0	14.0	102.0	24.0	176.0		
4KTC 225 S-8	18.5	17.6	224.0	16.8	214.0	15.0	194.0	14.0	174.0	17.6	129.0	17.6	129.0	-	-		
4KTC 225 M-8	22.0	21.0	265.0	20.0	253.0	18.0	229.0	16.0	206.0	21.0	153.0	21.0	153.0	-	-		
5KTC 250 M-8	30.0	28.0	358.0	27.0	342.0	24.0	310.0	22.0	279.0	28.0	207.0	28.0	207.0	-	-		
4KTC 280 S-8	37.0	34.0	436.0	33.0	417.0	30.0	378.0	27.0	339.0	34.0	252.0	34.0	252.0	-	-		
4KTC 280 M-8	45.0	41.0	527.0	40.0	504.0	36.0	457.0	32.0	410.0	42.0	305.0	42.0	305.0	-	-		
4KTC 315 S-8	55.0	50.0	644.0	48.0	616.0	44.0	558.0	39.0	501.0	51.0	372.0	51.0	372.0	-	-		
4KTC 315 MA-8	75.0	68.0	872.0	65.0	833.0	59.0	756.0	53.0	678.0	69.0	504.0	69.0	504.0	-	-		
4KTC 315 MB-8	90.0	81.0	1030.0	77.0	985.0	70.0	893.0	63.0	801.0	81.0	595.0	81.0	595.0	-	-		
4KTC 315 L-8	110.0	99.0	1260.0	95.0	1204.0	86.0	1092.0	77.0	980.0	99.0	728.0	99.0	728.0	-	-		



Mounting dimensions

The mounting dimensions allow the following tolerances:

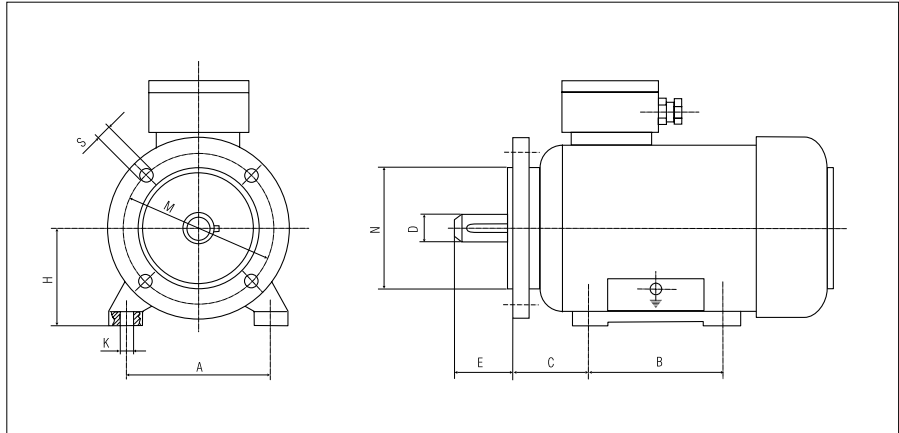


Dimensions		Tolerance
A, B	≤ 250 mm	± 0.75 mm
	> 250 mm ... 500 mm	± 1.00 mm
	> 500 mm ... 750 mm	± 1.50 mm
H	> 50 mm ... 250 mm	- 0.50 mm
	> 250 mm ... 630 mm	- 1.00 mm
C	≤ 85 mm	± 1.00 mm
	> 85 mm ... 130 mm	± 2.00 mm
	> 130 mm ... 240 mm	± 3.00 mm
	> 240 mm ... 500 mm	± 4.00 mm
M	≤ 200 mm	± 0.25 mm
	> 200 mm ... 500 mm	± 0.50 mm
	> 500 mm	± 1.00 mm
K and S	+ 3 % diameter	
E	≤ 30 mm	- 0.20 mm
	> 30 mm ... 110 mm	- 0.30 mm
D	≤ Ø 50 mm	k 6
	≥ Ø 50 mm	m 6
N	≤ 230 mm	j 6
	≥ 250 mm	h 6



Dimensions

Form IM B3

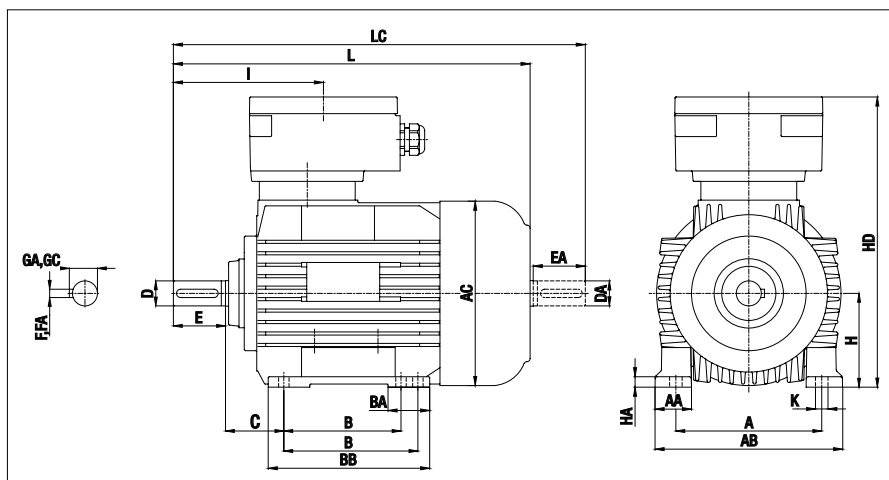


Dimensions

Frame size	A	AA	AB	AC	B	BA	BB	C	D DA	E EA	F FA	GC GA	H	HA	HD Ex de	HD Ex d	I	K	L	LC
4KTC 63 A, B	100	22	120	124	80	30	106	40	11	23	4	12.5	63	8	210	210	105	7	238	266
4KTC 71 A, B	112	30	140	139	90	30	114	45	14	30	5	16.0	71	10	218	218	113	9	272	307
4KTC 80 A, B	125	32	160	157	100	35	130	50	19	40	6	21.5	80	10	249	249	132	10	319	362
4KTC 90 S L	140	35	180	177	100 125	60	155	56	24	50	8	27.0	90	10	271	271	144	10	363	415
4KTC 100 L	160	45	205	195	140	45	175	63	28	60	8	31.0	100	17	288	288	158	12	418	481
4KTC 112 M	190	50	235	219	140	50	180	70	28	60	8	31.0	112	15	311	311	158	12	442	504
4KTC 132 S M	216	55	266	258	140 178	75	218	89	38	80	10	41.0	132	18	350	350	181	12	536	619
4KTC 160 M L	254	60	312	310	210 254	104	300	108	42	110	12	45.0	160	21	436	436	254	14	669	785
4KTC 180 M L	279	70	350	345	241 279	118	333	121	48	110	14	51.0	180	22	496	496	297	14	707	830
4KTC 200 L	318	80	398	385	305	95	365	133	55	110	16	59.0	200	21	546	546	308	18	790	910
4KTC 225 S M-2 M	356	80	438	434	286 311 311	113	374	149	60 55 60	140 110 140	18 16 18	64.0 59.0 64.0	225	23	589	589	340 310 340	18	884 854 884	1035 975 1035
5KTC 250 M-2 M	406	100	496	480	349	90	433	168	60 65	140	18	64.0 69.0	250	28	718	723	410	24	1007	1160
4KTC 280 S-2 S M-2 M	457	110	557	537	368 368 419 419	100	454 454 505 505	190	65 75 65 75	140	18 20 18 20	69.0 79.5 69.0 79.5	280	23	769	774	410	24	1036 1036 1096 1096	1191 1191 1251 1251
4KTC 315 S-2 S MA-2 MA MB-2 MB L-2 L	508	120	628	617	406 406 457 457 457 457 508 508	115	526 526 577 577 577 577 628 628	216	65 80 65 80 65 80 65 80	140 170 140 170 140 170 140 170	18 22 18 22 18 22 18 22	69.0 85.0 69.0 85.0 69.0 85.0 69.0 85.0	315	25	859	864	454 484 454 484 454 484 454 484	28	1050 1080 1220 1250 1220 1250 1300 1330	1210 1270 1380 1440 1380 1440 1460 1520



Dimensions

Form IM B5 (V1)

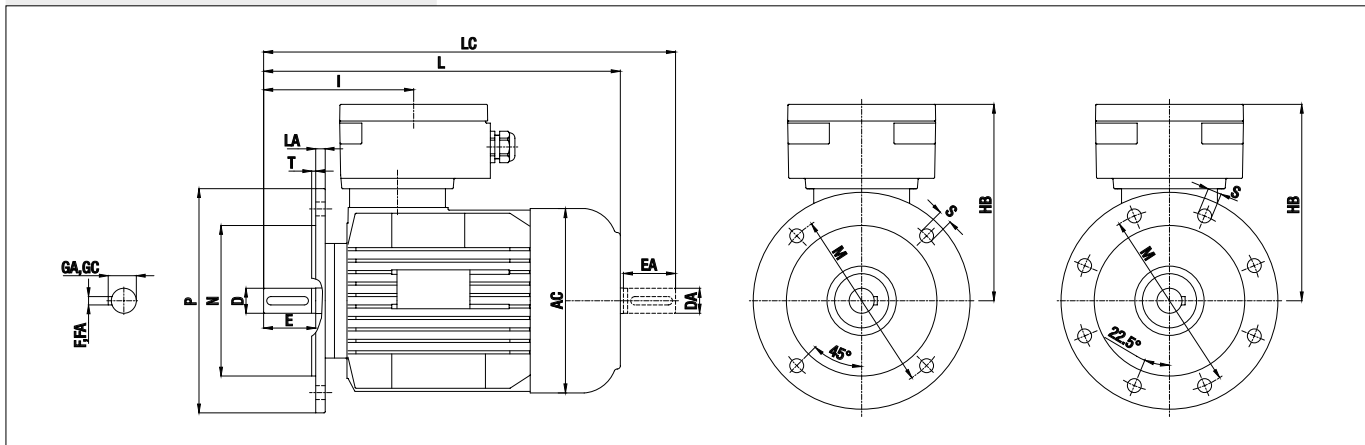


Dimensions

Frame size	Flange	AC	D DA	E EA	F FA	GC GA	HB Ex de	HB Ex d	I	L	LA	LC	M	N	P	S	No. of fixing holes	T
4KTC 63 A, B	F 115-I	124	11	23	4	12.5	147	147	105	238	8	266	115	95	140	9	4	3.0
4KTC 71 A, B	F 130-I	139	14	30	5	16.0	147	147	113	272	10	307	130	110	160	9	4	3.5
4KTC 80 A, B	F 165-I	157	19	40	6	21.5	169	169	132	319	10	362	165	130	200	12	4	3.5
4KTC 90 S, L	F 165-I	177	24	50	8	27.0	181	181	144	363	10	415	165	130	200	12	4	3.5
4KTC 100 L	F 215-I	195	28	60	8	31.0	188	188	158	418	11	481	215	180	250	14	4	4.0
4KTC 112 M	F 215-I	219	28	60	8	31.0	199	199	158	442	11	504	215	180	250	14	4	4.0
4KTC 132 S, M	F 265-I	258	38	80	10	41.0	218	218	181	536	12	619	265	230	300	14	4	4.0
4KTC 160 M, L	F 300-I	310	42	110	12	45.0	276	276	254	669	15	785	300	250	350	18	4	5.0
4KTC 180 M, L	F 300-I	345	48	110	14	51.0	316	316	297	707	15	830	300	250	350	18	4	5.0
4KTC 200 L	F 350-I	385	55	110	16	59.0	346	346	308	790	18	910	350	300	400	18	4	5.0
4KTC 225 S M-2 M	F 400-I	434	60 55 60	140 110 140	18 16 18	64.0 59.0 64.0	364	364	340 310 340	884 854 884	18	1035 975 1035	400	350	450	18	8	5.0
5KTC 250 M-2 M	F 500-I	480	60 65	140	18	64.0 69.0	468	473	410	1007	18	1160	500	450	550	19	8	5.0
4KTC 280 S-2 S M-2 M	F 500-I	537	65 75 65 75	140	18 20 18 20	69.0 79.5 69.0 79.5	489	494	410	1036 1036 1096 1096	18	1191 1191 1251 1251	500	450	550	19	8	5.0
4KTC 315 S-2 S MA-2 MA MB-2 MB L-2 L	F 600-I	617	65 80 65 80 65 80 65 80	140 170 140 170 140 170 140 170	18 22 18 22 18 22 18 22	69.0 85.5 69.0 85.5 69.0 85.5 69.0 85.5	544	549	454 484 454 484 454 484 454 484	1050 1080 1220 1250 1220 1250 1300 1330	22	1210 1270 1380 1440 1380 1440 1460 1520	600	550	660	24	8	6.0



Dimensions

Form IM B3/B5

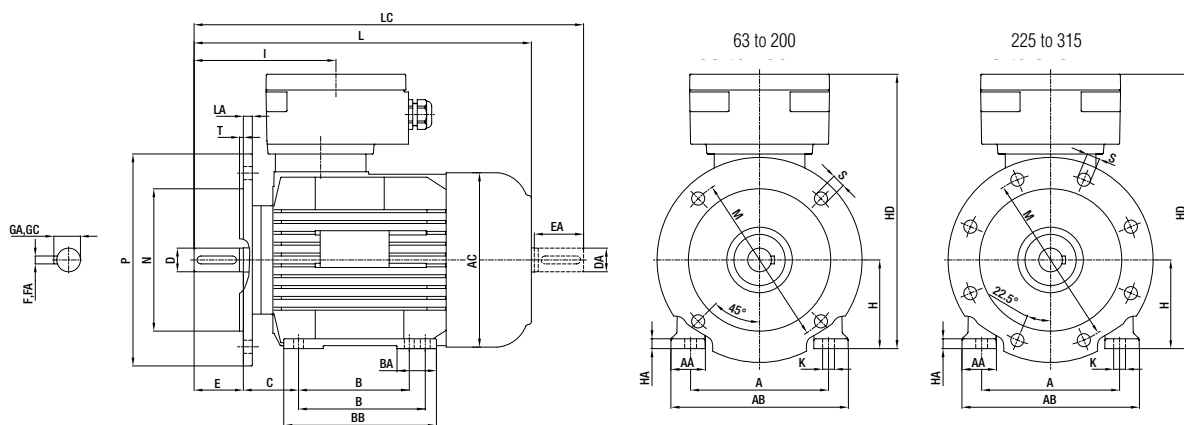


Dimensions

Frame size	Flange	A	AA	AB	AC	B	BA	BB	C	D	DA	E	EA	F	FA	GC	GA	H	HA	HD	Ex	HD	Ex	d	I	K	L	LA	LC	M	N	P	S	No. of fixing holes
4KTC 63 A, B	F 115-I	100	22	120	124	80	30	106	40	11	23	4	12.5	63	8	210	210	105	7	238	8	266	115	95	140	9	4							
4KTC 71 A, B	F 130-I	112	30	140	139	90	30	114	45	14	30	5	16.0	71	10	218	218	113	9	272	10	307	130	110	160	9	4							
4KTC 80 A, B	F 165-I	125	32	160	157	100	35	130	50	19	40	6	21.5	80	10	249	249	132	10	319	10	362	165	130	200	12	4							
4KTC 90 S L	F 165-I	140	35	180	177	100 125	60	155	56	24	50	8	27.0	90	10	271	271	144	10	363	10	415	165	130	200	12	4							
4KTC 100 L	F 215-I	160	45	205	195	140	45	175	63	28	60	8	31.0	100	17	288	288	158	12	418	11	481	215	180	250	14	4							
4KTC 112 M	F 215-I	190	50	235	219	140	50	180	70	28	60	8	31.0	112	15	311	311	158	12	442	11	504	215	180	250	14	4							
4KTC 132 S M	F 265-I	216	55	266	258	140 178	75	218	89	38	80	10	41.0	132	18	350	350	181	12	536	12	619	265	230	300	14	4							
4KTC 160 M L	F 300-I	254	60	312	310	210 254	104	300	108	42	110	12	45.0	160	21	436	436	254	14	669	15	785	300	250	350	18	4							
4KTC 180 M-2 L	F 300-I	279	70	350	345	241 279	118	333	121	48	110	14	51.0	180	22	496	496	297	14	707	15	830	300	250	350	18	4							
4KTC 200 L	F 350-I	318	80	398	385	305	95	365	133	55	110	16	59.0	200	21	546	546	308	18	790	18	910	350	300	400	18	4							
4KTC 225 S M-2 M	F 400-I	356	80	438	433	286 311 311	113	374	149	60 55 60	140 110 140	18 16 18	64.0 59.0 64.0	225	23	589	589	340 310 340	18	884 854 884	18	1035 975 1035	400	350	450	18	8							
5KTC 250 M-2 M	F 500-I	406	100	496	480	349	90	433	168	60 65	140	18	64.0 69.0	250	28	718	723	410	24	1007	18	1160	500	450	550	19	8							
4KTC 280 S-2 S M-2 M	F 500-I	457	110	557	537	368 368 419 419	100	454 505 505	190	65 75 65 75	140	18 20 18 20	69.0 79.5 69.0 79.5	280	23	769	774	410	24	1036 1036 1096 1096	18	1191 1191 1251 1251	500	450	550	19	8							
4KTC 315 S-2 S MA-2 MA MB-2 MB L-2 L	F 600-I	508	120	628	617	406 406 457 457 457 508 508	115	526 526 577 577 577 628 628	216	65 80 65 80 65 80 80	140 170 140 170 140 170 170	18 22 18 22 18 22 22	69.0 85.5 69.0 85.5 69.0 69.0 85.5	315	25	859	864	454 484 454 484 454 484 484	28	1050 1080 1220 1250 1220 1300 1330	22	1210 1270 1380 1440 1380 1440 1520	600	550	660	24	8							



Dimensions

Form IM B3/B14

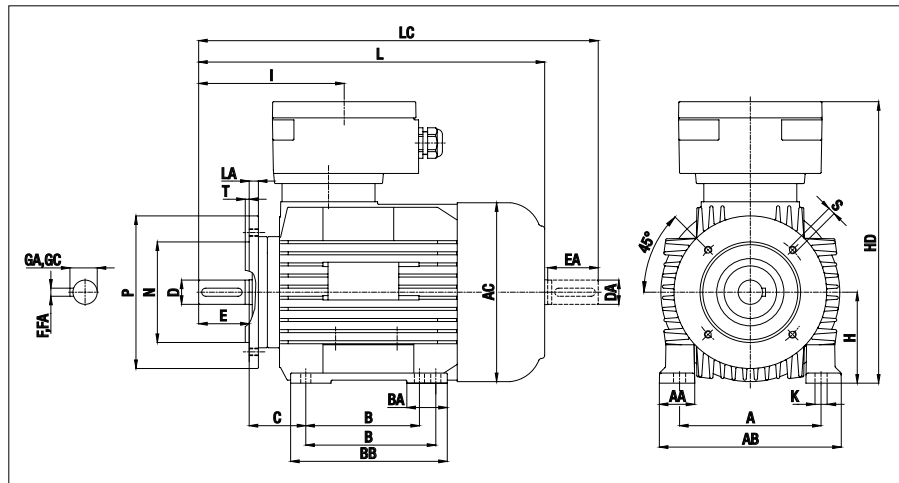


Dimensions

Frame size	Flange	A	AA	AB	AC	B	BA	BB	C	D DA	E EA	F FA	GC GA	H	HA	HD	I	K	L	LC	M	N	P	S	No. of fixing holes	T
4KTC 63 A, B	F 75-II F 100-II	100	22	120	124	80	30	106	40	11	23	4	12.5	63	8	210	105	7	238		75 100	60 80	90 120	M5 M6	4	2.5 3.0
4KTC 71 A, B	F 85-II F 115-II	112	30	140	139	90	30	114	45	14	30	5	16.0	71	10	218	113	9	272	307	85 115	70 95	105 140	M6 M8	4	2.5 3.0
4KTC 80 A, B	F 100-II F 130-II	125	32	160	157	100	35	130	50	19	40	6	21.5	80	10	249	132	10	319	362	100 130	80 110	120 160	M6 M8	4	3.0 3.5
4KTC 90 S, L	F 115-II F 130-II	140	35	180	177	100 125	60	155	56	24	50	8	27.0	90	10	271	144	10	363	415	115 130	95 110	140 160	M8 M8	4	3.0 3.5
4KTC 100 L	F 130-II F 165-II	160	45	205	195	140	45	175	63	28	60	8	31.0	100	17	288	158	12	418	481	130 165	110 130	160 200	M8 M10	4	3.5 3.5
4KTC 112 M	F 130-II F 165-II	190	50	235	219	140	50	180	70	28	60	8	31.0	112	15	311	158	12	442	504	130 165	110 130	160 200	M8 M10	4	3.5 3.5



Dimensions

Form IM B14

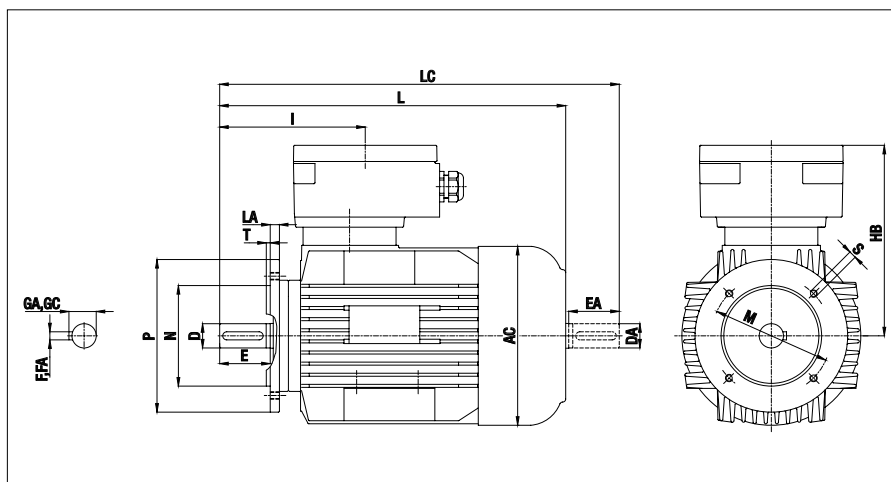


Dimensions

Frame size	Flange	AC	D DA	E EA	F FA	GC GA	HB	I	L	LC	M	N	P	S	No. of fixing holes	T
4KTC 63 A, B	F 75-II F 100-II	124	11	23	4	12.5	147	105	238	266	75 100	60 80	90 120	M5 M6	4	2.5 3.0
4KTC 71 A, B	F 85-II F 115-II	139	14	30	5	16.0	147	113	272	307	85 115	70 95	105 140	M6 M8	4	2.5 3.0
4KTC 80 A, B	F 100-II F 130-II	157	19	40	6	21.5	169	132	319	362	100 130	80 110	120 160	M6 M8	4	3.0 3.5
4KTC 90 S, L	F 115-II F 130-II	177	24	50	8	27.0	181	144	363	415	115 130	95 110	140 160	M8 M8	4	3.0 3.5
4KTC 100 L	F 130-II F 165-II	195	28	60	8	31.0	188	158	418	481	130 165	110 130	160 200	M8 M10	4	3.5 3.5
4KTC 112 M	F 130-II F 165-II	219	28	60	8	31.0	199	158	442	504	130 165	110 130	160 200	M8 M10	4	3.5 3.5



Special execution

Ex brake

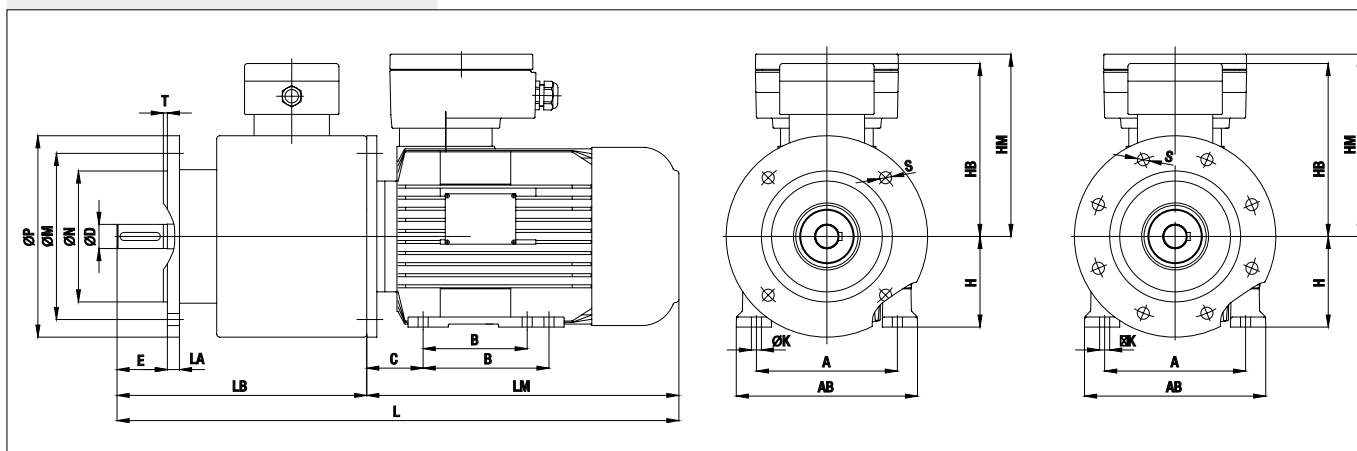


Dimensions

Frame size	Brake frame size	A	AB	B	C	D	E	H	HB	HM	Ø K	LA	LB	LM	L	Ø M	Ø N	Ø P	S	No. of fixing holes
4KTC 63 A, B	63	100	120	80	40	11	23	63	185	147	7	10	168	215	383	115	95	140	9	4
4KTC 71 A, B	71	112	140	90	45	14	30	71	185	147	9	10	175	242	417	130	110	160	9	4
4KTC 80 A, B	80	125	160	100	50	19	40	80	215	169	10	12	238	279	517	165	130	200	11	4
4KTC 90 S L	90	140	180	100 125	56	24	50	90	215	181	10	12	248	313	651	165	130	200	11	4
4KTC 100 L	100/112	160	205	140	63	28	60	100	240	188	12	14	276	358	634	215	180	250	14	4
4KTC 112 M	100/112	190	235	140	70	28	60	112	240	199	12	14	276	382	658	215	180	250	14	4
4KTC 132 S M	132	216	266	140 178	89	38	80	132	265	218	12	18	322	456	778	265	230	300	14	4
4KTC 160 M L	160	254	312	210 254	108	42	110	160	265	276	14	18	352	559	911	300	250	350	16	4
4KTC 180 M L	180	279	350	241 279	121	48	110	180	282	316	14	21	410	597	1007	300	250	350	18	4
4KTC 200 L	200	318	398	305	133	55	110	200	282	346	18	21	410	680	1090	350	300	400	18	4
4KTC 225 S M2 M	225	356	436	286 311 311	149	60 55 60	140 110 140	225	282	364	18	21	440	744	1184	300	400	450	18	8
5KTC 250 M2	250	406	496	349	168	60 65	140	250	328	473	24	26	450	867	1317	500	450	550	18	8
4KTC 280 S2 S M2 M	280	457	557	368 368 419 419	190	65 75 65 75	140	280	328	494	24	26	450	896 896 956 956	1346 1346 1406 1406	500	450	550	18	8



Special execution

Encoder

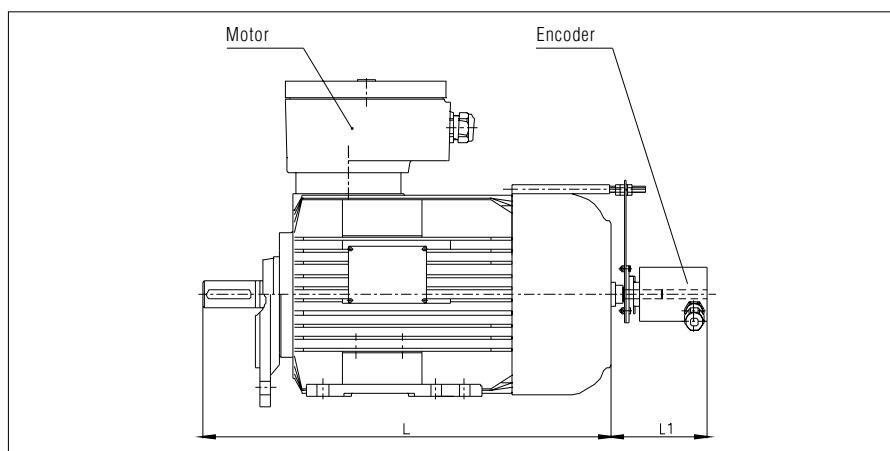


Dimensions

Motor 1			L (mm)	Encoder (L1) Kuebler
4KTC	71	A, B	272	125
4KTC	80	A, B	319	125
4KTC	90	L	363	125
4KTC	100	L	418	125
4KTC	112	M	442	125
4KTC	132	S, M	536	125
4KTC	160	M, L	669	130
4KTC	180	M, L	707	130
4KTC	200	L	790	130
4KTC	225	M2	854	130
4KTC	225	S, M4, M6, M8	884	130
5KTC	250	M	1007	130
4KTC	280	S	1036	130
4KTC	280	M	1096	130
4KTC	315	S2	1050	130
4KTC	315	S4, S6, S8	1080	130
4KTC	315	M2	1220	130
4KTC	315	M4, M6, M8	1250	130
4KTC	315	L2	1300	130
4KTC	315	L4, L6, L8	1330	130



Special execution

Forced cooling

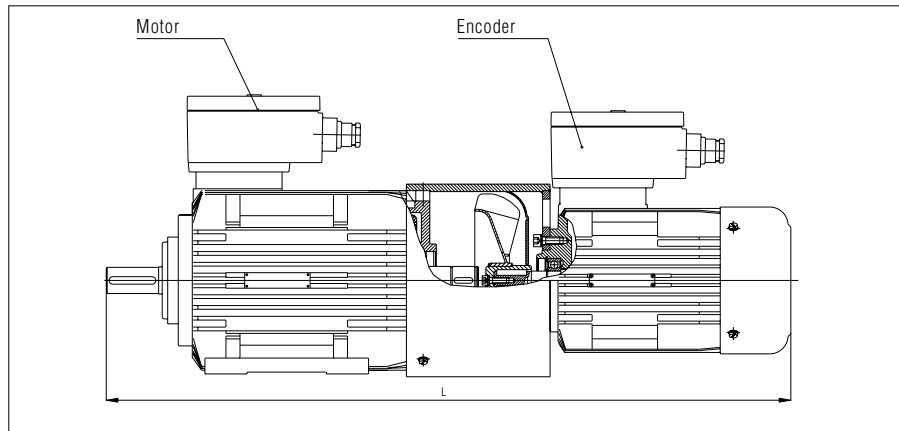


Dimensions		
Motor 1	Motor 2	L (mm)
4KTC 71	4KTC 71 A2	538
4KTC 80		614
4KTC 90		639
4KTC 100		697
4KTC 112		728
4KTC 132		823
4KTC 160		958
4KTC 180	4KTC 80 A4	1037
4KTC 200		1145
4KTC 225 M2		1201
4KTC 225 M, S4, S6, S8		1231
5KTC 250	4KTC 90 L4	1395
4KTC 280 S		1422
4KTC 280 M		1482
4KTC 315 S2		1430
4KTC 315 S4, S6, S8		1460
4KTC 315 M2		1600
4KTC 315 M4, M6, M8		1630
4KTC 315 L2		1680
4KTC 315 L4, L6, L8		1710



Special execution

Direct cable entry

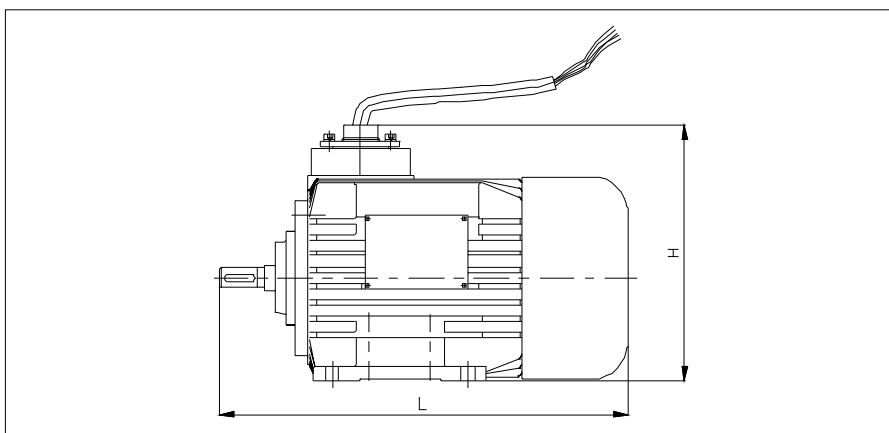

Dimensions

Motor			L	H
4KTC 71	A, B		272	191
4KTC 80	A, B		319	207
4KTC 90	S, L		363	226
4KTC 100	L		418	243
4KTC 112	M		442	267
4KTC 132	S, M		536	307
4KTC 160	M, L		669	371
4KTC 180	M, L		707	426
4KTC 200	L		790	488
4KTC 225	S, M-2		854	533
4KTC 225	S, M-4, 6, 8		884	523

*Special applications*

Frame sizes	63	71	80	90	100	112	132	160	180	200	225	250	280	315
Special voltage up to 690 V	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Special frequency	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Frequency inverter drive	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Special power	op	op	op	op	op	op	op	op	op	op	op	op	op	op
Special shaft end	op	op	op	op	op	op	op	op	op	op	op	op	op	op
Free shaft end on NDS-end of motor	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Special flange	op	op	op	op	op	op	op	op	op	op	op	op	op	op
Flange made in R acc. to DIN 42955	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Additional greasing								●	●	●	●	●	●	●
Fixed bearing on AS													●	●
2RS bearings	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Oil seal	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Protection class IP 56	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Protection class IP 65	op	op	op	op	op	op	op	op	op	op	op	op	op	op
Protection class IP 66	op	op	op	op	op	op	op	op	op	op	op	op	op	op
Protection cover	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Vibrations within R or S limits	●	●	●	●	●	●	●	●	●	●	●	●	●	●
SPM placing								op	op	op	op	op	op	op
Special data plate	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Terminal box with Ex d cable glands	op	op	op	op	op	op	op	op	op	op	op	op	op	op
Tropical version	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Thermal protection of winding	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Thermal protection of bearings								●	●	●	●	●	●	●
Heating of winding against condensation	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Heating of winding at temperature lower -20 °C	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Insulation class H	●	●	●	●	●	●	●	●	●	●	●	●	●	●
VIK execution	●	●	●	●	●	●	●	●	●	●	●	●		
Marine execution (LRS)	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Special colour	●	●	●	●	●	●	●	●	●	●	●	●	●	●

● on request
op = option

Ordering data


- Rating in kW
- Voltage and frequency
- Start connection (on-line or star-delta)
- RPM
- Type of motor arrangement
- Type of explosion protection (Gas group and T-classification)
- Mechanical requirements
- Special requirements (i. e. H-class thermal insulation, two-shaft, radial bearing seals).

**Automation Technology****Enterprise Mobility****Control and Connection Equipment****Communication and Safety Systems****Switchgear and Motors****Analyzers and Measurement Technology****Measurement and Data Acquisition Systems****Heating Technology****Electrical Engineering for Mining****BARTEC Safe.t® Engineering and Service****BARTEC Safe.t® Academy****Committed to safety**

Safety technology is indispensable to life in all areas where hazardous substances such as oil, gas or dust are handled. One spark is sufficient to ignite an explosive mixture. All component and system solutions developed by BARTEC meet the requirements specified in the European directives (ATEX) as well as in international standards and recommendations.

Throughout the world, people know and trust in the name BARTEC. The confidence of our customers commits us to meeting the highest quality standards. We are proud of many long-time partnerships with our customers.

BARTEC protects
people and
the environment
by the safety

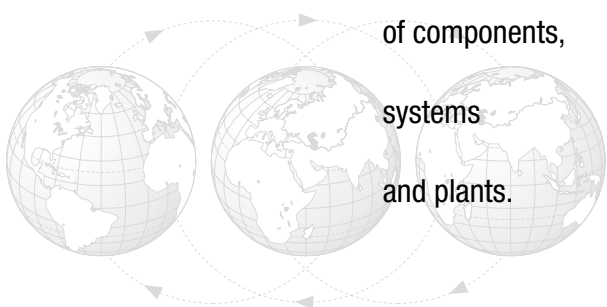

of components,
systems
and plants.

BARTEC GmbH

Max-Eyth-Str. 16
97980 Bad Mergentheim
Germany

Phone: +49 7931 597 0
Fax: +49 7931 597 119

info@bartec.de
www.bartec.de

BARTEC VARNOST d.o.o.

Cesta 9, avgusta 59
1410 Zagorje ob Savi
Slovenia

Phone: +386 59 221 471
Fax: +386 59 221 470

info@bartec-varnost.si
www.bartec-varnost.si